


LS Industrial Systems Electric Products

MCB / MC&TOR / MMS / MCCB / ACB / FDB / SMDB / VCB



Electric Equipment

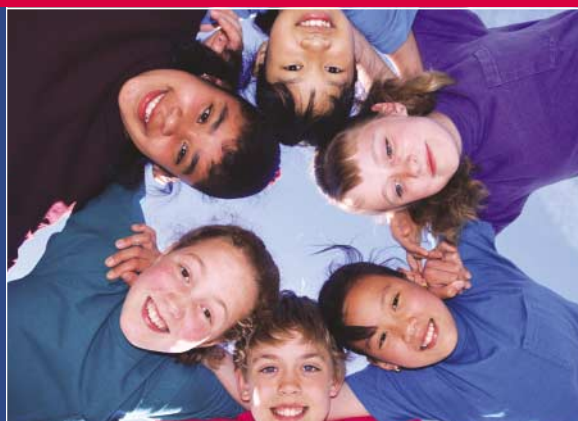

Miniature Circuit Breakers

Page 4

- 1, 2, 3 and 4 pole series up to 125AF
- B, C and D Characteristics

Residual Current Circuit Break

Page 6

- 2 and 4 pole series up to 100AF
- Sensitivity up to 300mA
- Overcurrent protection type available

Surge Protective Device

Page 8



Contactors & Overload Relays

Page 12

Metasol series

- 3 and 4 pole series up to 800AF Mini-contactors available
- AC/DC common use coil from 100AF
- Thermal (Bimetallic) and electronic type overload relays are available
- CE marked and UL approved

Mini contactors

Page 20

Digital motor protection relay

Page 21

Manual Motor Starters

Page 22



Molded Case Circuit Breakers

Page 24

Susol/Metasol series

- 2, 3 and 4 pole series up to 800AF
- Rated ambient temperature at 40 °C calibrated for 50 °C available
- CE marked according to IEC standard and UL approved MCCBs are also available.

Earth Leakage Circuit Breakers

Page 30

Metasol series

- 2, 3 and 4 pole series up to 800AF
- CE marked according to IEC standard



Air Circuit Breakers

Page 34

Susol/Metasol series

- 65, 85 and 150kA breaking capacity
- High functional digital trip relays
- CE marked and Marine classification

LS Final Distribution Boards

Page 40

LS SMDB Solution

Page 44

Vacuum Circuit Breakers

Page 48

Susol series




Miniature circuit breakers


1, 2, 3 and 4 pole series up to 125AF

Type	BKN	BKN-c	BKN-b	
Protection	Overload and short circuit		Overload and short circuit	
Rated current	1, 2, 3, 4, 6, 10, 16, 20, 25, 32, 40, 50, 63A		1, 2, 3, 4, 6, 10, 16, 20, 25, 32, 40, 50, 63A	
Characteristic	B, C, D curve		B, C, D curve	
Poles	1p, 1p+N, 2p, 3p, 3p+N, 4p		1p, 1p+N, 2p, 3p, 3p+N, 4p	
Breaking capacity	1pole	2~4pole	1pole	2~4pole
	1A	6kA at 230/400VAC	6kA at 400VAC	10kA at 230/400VAC
	2A			
	3A			
	4A			
	6A			
	10A			
	16A			
	20A			
	25A			
	32A			
	40A			
	50A			
	63A			
	80A			
100A				
125A				
Standard	IEC 60898/60947-2		IEC 60898/60947-2	
Type of trip	Thermal magnetic release		Thermal magnetic release	
Electrical endurance	6000 operations		8000 operations	
Mount	On 35mm DIN rail		On 35mm DIN rail	
Width	17.8mm per pole		17.8mm per pole	
Terminal	Lug type(cable up to 25mm²)	Dual type(Lug & Screw)	Lug type(cable up to 25mm²)	
Auxiliary switch, AX				
Optional				
Dimension	See page 1		See page 2	
Characteristic curve	See curve 1		See curve 1	


Drawing 1 : Type BKN & BKN-c

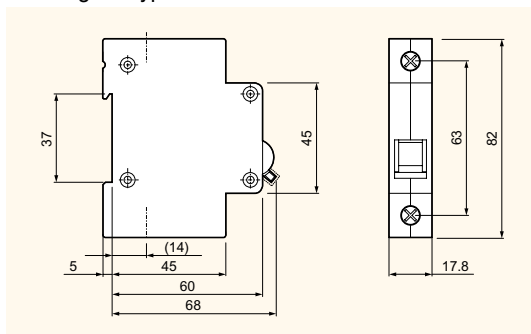

Drawing 2 : Type BKN-b

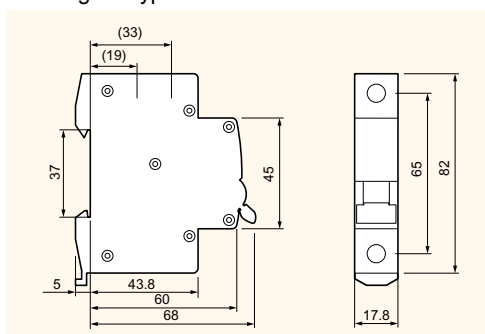


Drawing 3 : Type BKH

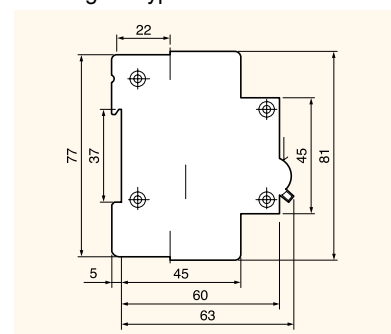




BKH		BKP	BFN
Overload and short circuit		Overload and short circuit	Overload and short circuit
63, 80, 100A, 125A		3, 6, 10, 16, 20, 25, 32A	5, 10, 15, 20, 30, 40, 50A
C, D curve		B, C, D curve	1P, 2P, 3P
1p, 2p, 3p, 3p+N, 4p		1p+N	1P, 2P, 3P
1pole	2~4pole		
		4.5kA at 230VAC	
			10kA at 220/240VAC
10kA at 230/400VAC	10kA at 400VAC		
IEC 60947-2		IEC 60898	IEC 60947-2
Thermal magnetic release		Thermal magnetic release	Thermal magnetic release
6000 operations		20000 operations	10, 000 operations
On 35mm DIN rail		On 35mm DIN rail	Plug-in
27mm per pole		17.8mm per pole	25mm per pole
Lug type(cable up to 50mm²)		Lug type(cable up to 10mm²)	Lug type (14-6 AWG.)
See page 3		See page 4	See page 5
See curve 1		See curve 1	See curve 2


Curve 1 : Type BKP, BKN, BKN-b, BKH, RKP

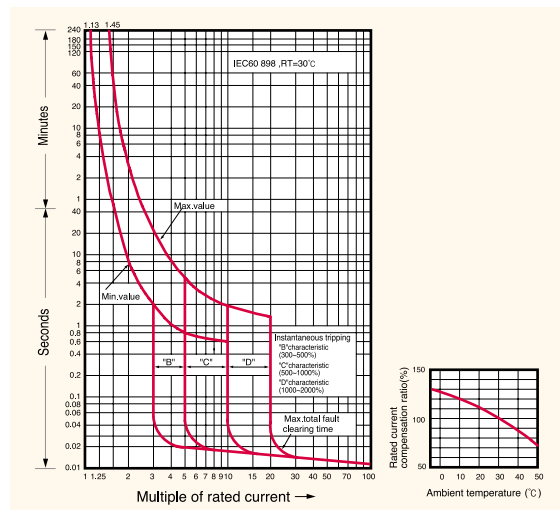


Curve 2 : Type BFN

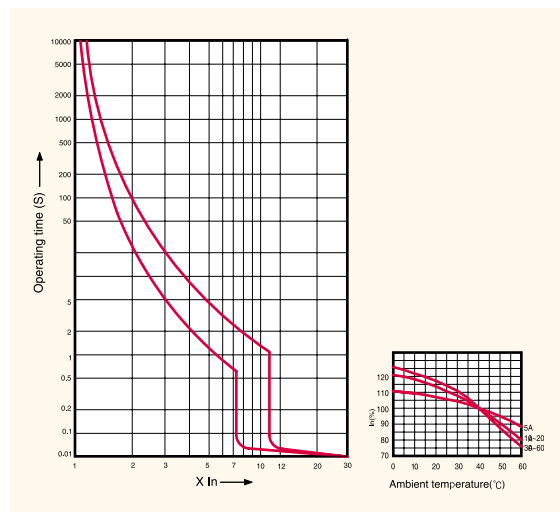

Drawing 4 : Type BKP

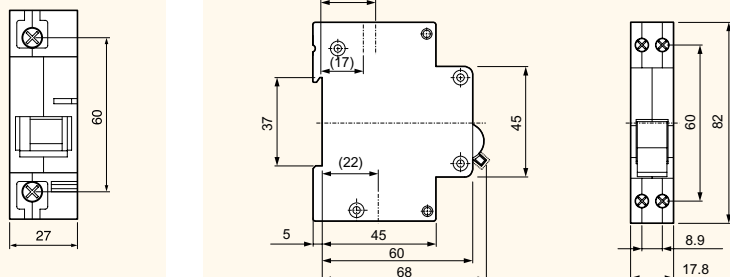

Drawing 5 : Type BFN

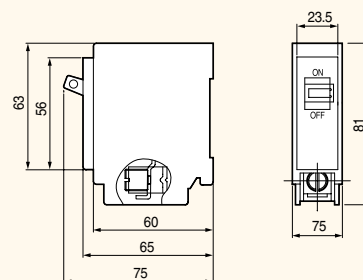


Residual current circuit breakers


2 and 4 pole series up to 63AF

Type	RKP	RKS	RKS-b	RKN	RKN-b
Protection	Ground fault and overcurrent	Ground fault and overcurrent	Ground fault	Ground fault	
Rated current, I _n	3(C,D),6,10,16,20,25,32A(B,C,D curve)	6, 10, 16, 20, 25, 32A (B, C curve)		25, 32, 40, 63A	25, 32, 40, 63, 100A
Rated residual current					
Operating, I _{Δn}	30, 100, 300mA(non-adjustable)	30, 100mA (non-adjustable)		30, 100, 300mA(non-adjustable)	
Non-operating, I _{Δno}	0.5I _{Δn}	0.5I _{Δn}		0.5I _{Δn}	
Number of poles	1P+N	1P+N		2, 4 pole	
Rated voltage	230VAC	230VAC		230VAC(2p), 230/400VAC(4p)	
Residual current off-time	≤ 0.1 sec.	≤ 0.3 sec.		≤ 0.1 sec.	
Standard	IEC 61009	IEC 61009		IEC 61008	
Type of trip					
Ground fault	Electro-magnetic	Electro-magnetic		Electro-magnetic	
Overcurrent	Thermal-magnetic	Thermal-magnetic		N.A	
Breaking capacity	4.5kA	10kA			
Conditional short circuit capacity				6kA for I _n =25, 32, 40, 63A	10kA
Electrical endurance	20000 operations	≤ 4000 operations		6000 operations	
Mount	On 35.6mm DIN rail	On 35mm DIN rail		On 35mm DIN rail	
Width	18mm per pole	18mm per pole		18mm per pole	
Terminal	Lug type(cable up to 10mm ²)	Lug type(cable up to 10mm ²)		Lug type(cable up to 35mm ²)	
Dimension	See drawing 1	See drawing 5	See drawing 6	See drawing 2	See drawing 7
Characteristic curve	See page 5 (curve 1)				


Drawing 1 : Type RKP

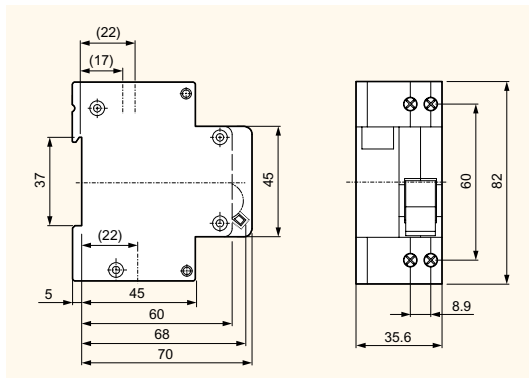


Drawing 5 : Type RKS

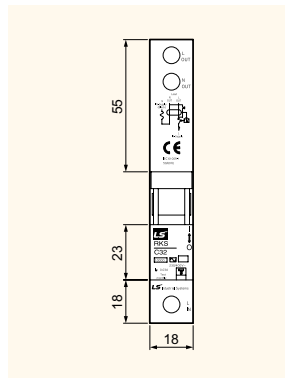


Drawing 6 : Type RKS-b

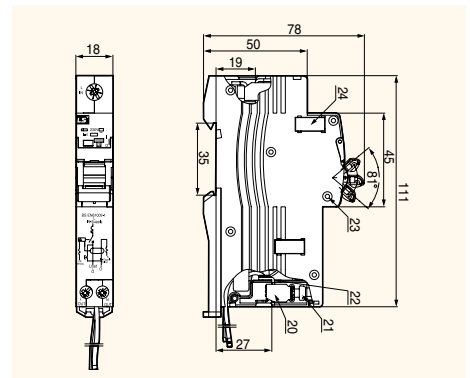

Drawing 2 : Type RKN

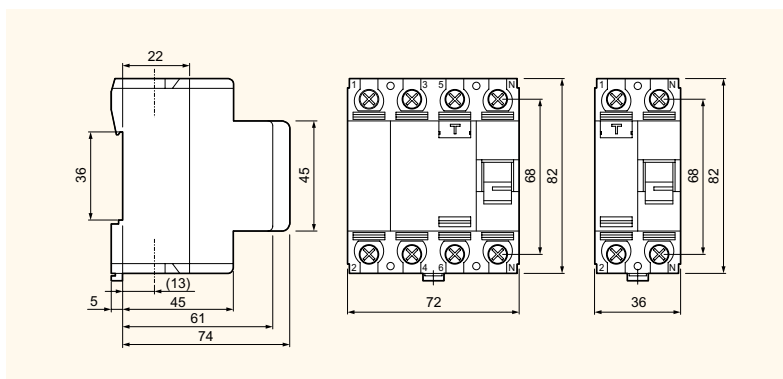

Drawing 7 : Type RKN-b

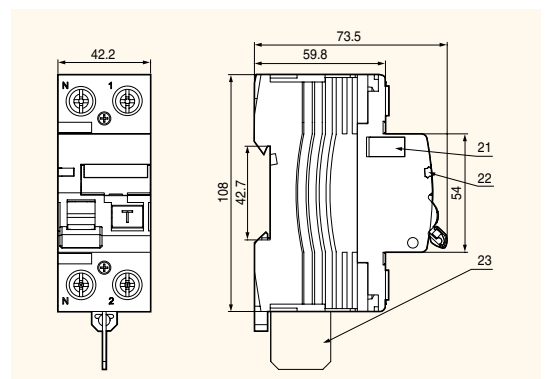





32KGRc	32KGRd
Ground fault and overcurrent	
15, 20, 30A	
15, 30mA(non-adjustable)	
0.5I _{Δn}	
2 pole	
110/220VAC	
≤ 0.03 sec.	
KS, JIS *(IEC61009)	
Electronic	
Bimetallic	
1.5kA	2.5kA
6000 operations	
On 35mm DIN rail	
35mm	
Screw clamp type(cable up to 25mm ²)	
See drawing 3	
See curve 1	

Note) * IEC61009 standard is applicable for 32KGRa only.

Drawing 3 : Type 32KGRc & 32KGRd

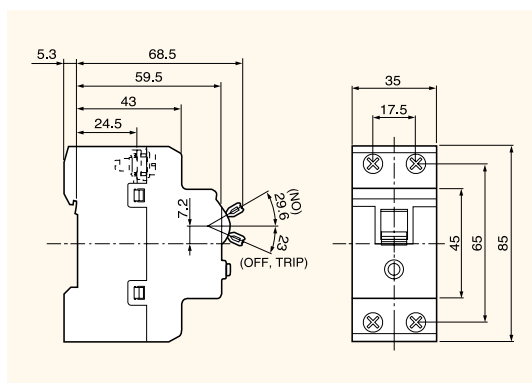


Drawing 4 : Type BKD

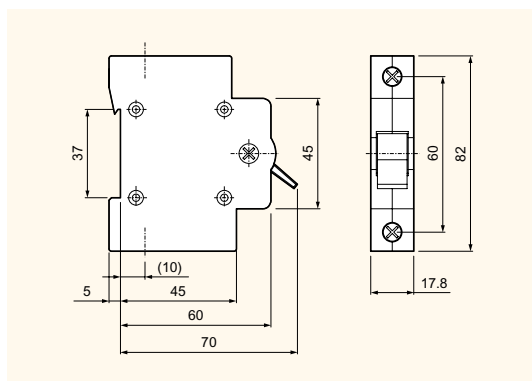

Type		BKD
Rated current, In		40, 50, 63, 80, 100, 125A
Number of poles		1p, 2p, 3p, 4p
Rated voltage		240/415VAC
Standard		IEC 60947-3
Electrical endurance	40, 50, 63A	20000 operations
	80, 100, 125A	10000 operations
Mount		On 35mm DIN rail
Width		17.8mm per pole
Terminal		Lug type(cable up to 50mm²)
Dimension		See drawing 4

Curve 1 : Type 32KGRc, 32KGRd

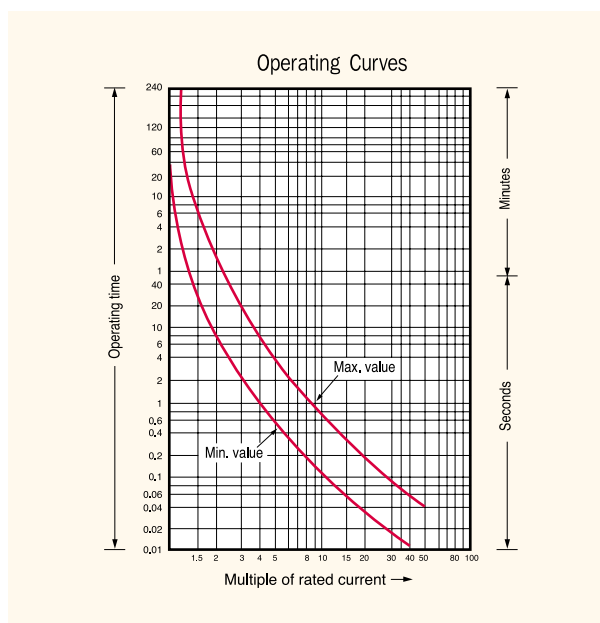

Surge Protective Device

BKS Series

Din-rail type

Product description

The BKS surge protective device is applied to the alternating current 50/60Hz, 220V/380V power system and provides the protection from the surge overvoltage of an electric system.

Moreover, it is the protection element (MOV) replacement type and is the product with convenience and economic efficiency.

However, only the protection module is provided so that separate components have to be combined according to the site conditions.



If the protective device is normal, the display becomes green. The display becomes red after operation (abnormal or after an accident).

Product rating

Type	BKS-A	BKS-B	BKS-C	BKS-D	BKS-E
Pole	1, 2, 3, 4 Pole				
Rated system voltage U_n (Applied Voltage)	AC 220V	AC 220V	AC 220V	AC 380V	AC 380V
Maximum continuous operating voltage U_c (MCOV, The voltage applied to the surge protective device)	AC 320	AC 320V	AC 320V	AC 420V	AC 460V
Voltage protection level U_p (The voltage level with the surge suppressed)	1.0kA	1.2kA	1.5kA	2.0kA	2.3kA
Maximum discharge current $I_{max}(8/20\mu s)$ kA	10kA	20kA	40kA	60kA	70kA
Response time ns	< 25 ns				
Usable ambient temperature $^{\circ}C$	-40 ~ +80 $^{\circ}C$				
Usable frequency Hz	50/60 Hz				
Attachment type	DIN-rail attachment type				
Operation status indication window	Normal operation: Green, Abnormal/After an accident: Red				
Product color and shape					
Min. terminal connection (mm ²)	1 Phase and Neutral 2.5, Earth 4				
Protection class	Class III		Class II		
Alarm Contact	No	No	No	No	No

* The surge protective device starts to operate above the maximum continuous operating voltage U_c (MCOV).

Drawing

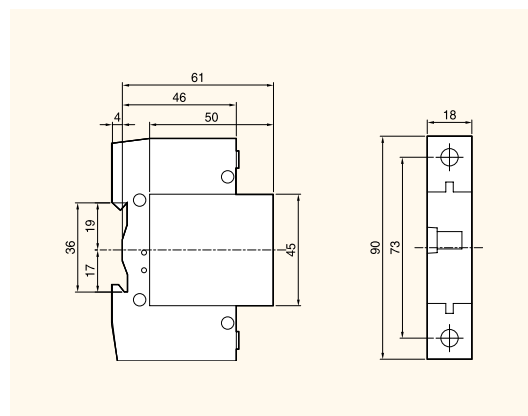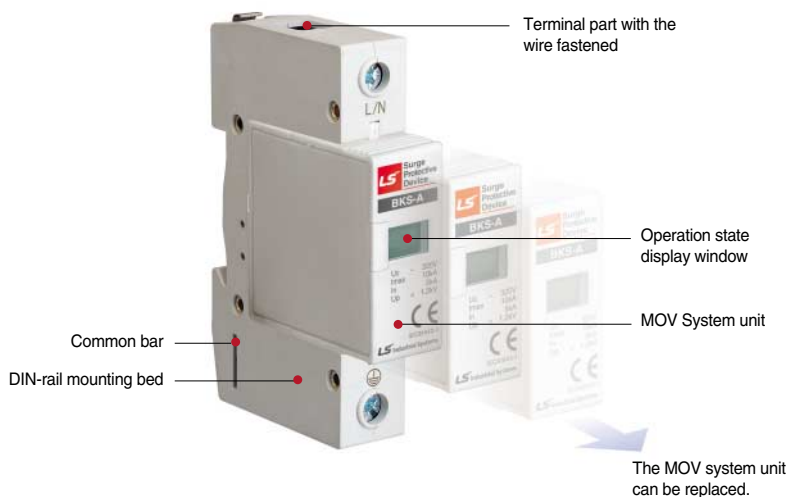

SP Series

Box type

The SP series surge protective device is applied to the alternating current 50/60Hz, 220V/380V power system and provides the protection from the surge overvoltage of an electric system.

Moreover, the protection module, disconnectable device (fuse), and fastened power and ground wires are organized into the all-in-one steel cabinet with convenient installation and stability.

If the protective device is normal, the display becomes green. The display becomes red after operation (abnormal or after an accident).

Product rating-Single phase 2W+G (SPL)

Type	SPL-110S 20kA	SPL-220S 40kA	SPL-220S 80kA
Pole	2W+G	2W+G	2W+G
Rated system voltage U_n (Applied Voltage)	AC 110V/220V	AC 220V	AC 220V
Maximum continuous operating voltage U_c (MCOV, The voltage applied to the surge protective device)	AC 320V	AC 320V	AC 320V
Voltage protection level U_p (The voltage level with the surge suppressed)	1.5kV	1.5kV	1.5kV
Maximum discharge current $I_{max}(8/20\mu s)$ kA	20kA	40kA	80kA
Response time ns	< 5 ns		
Usable ambient temperature $^{\circ}C$	-40 ~ +70 $^{\circ}C$		
Usable frequency Hz	50/60 Hz		
Attachment type	Screw attachment type		
Operation status indication window	Normal operation: Green LED lighting, Abnormal/After an accident: Red lighting		
Dimension(W×H×D)	60×87×47	68×90×70	95×117×68
Product color and shape			
Protection class	Class III	Class II / Class III	Class II / Class III

Surge Protective Device

SP Series

Box type

Product rating-Three phase 3W+G (SPT) AC 380V

Type	SPT-380S 40kA	SPT-380S 80kA	SPT-380S 120kA	SPT-380S 160kA
Pole	3W+G	3W+G	3W+G	3W+G
Rated system voltage U_n (Applied Voltage)	AC 380V	AC 380V	AC 380V	AC 380V
Maximum continuous operating voltage U_c (MCOV, The voltage applied to the surge protective device)	AC 320V	AC 320V	AC 320V	AC 320V
Voltage protection level U_p (The voltage level with the surge suppressed)	2.0kV	2.0kV	2.0kV	2.0kV
Maximum discharge current $I_{max}(8/20\mu s)$ kA	40kA	80kA	120kA	160kA
Response time ns	< 5 ns			
Usable ambient temperature $^{\circ}C$	-40 ~ +70 $^{\circ}C$			
Usable frequency Hz	50/60 Hz			
Attachment type	Screw attachment type			
Operation status indication window	Normal operation: Green LED lighting, Abnormal/After an accident: Red lighting			
Dimension(W×H×D)	113×160×80	130×160×80	160×190×86	160×190×86
Product color and shape				
Protection class	Class II / Class III		Class I / Class II / Class III	

Product rating-Three phase 3W+G (SPT) AC 440V

Type	SPT-440S 40kA	SPT-440S 80kA	SPT-440S 120kA	SPT-440S 160kA
Pole	3W+G	3W+G	3W+G	3W+G
Rated system voltage U_n (Applied Voltage)	AC 440V	AC 440V	AC 440V	AC 440V
Maximum continuous operating voltage U_c (MCOV, The voltage applied to the surge protective device)	AC 320V	AC 320V	AC 320V	AC 320V
Voltage protection level U_p (The voltage level with the surge suppressed)	2.0kV	2.0kV	2.0kV	2.0kV
Maximum discharge current $I_{max}(8/20\mu s)$ kA	40kA	80kA	120kA	160kA
Response time ns	< 5 ns			
Usable ambient temperature $^{\circ}C$	-40 ~ +70 $^{\circ}C$			
Usable frequency Hz	50/60 Hz			
Attachment type	Screw attachment type			
Operation status indication window	Normal operation: Green LED lighting, Abnormal/After an accident: Red lighting			
Dimension(W×H×D)	113×160×80	130×160×80	160×190×86	160×190×86
Product color and shape				
Protection class	Class II / Class III		Class I / Class II / Class III	

Product rating-Three phase 4W+G (SPY)

Type	SPY-220S 40kA	SPY-220S 80kA	SPY-220S 120kA	SPY-220S 160, 200, 240kA
Pole	4W+G	4W+G	4W+G	4W+G
Rated system voltage U_n (Applied Voltage)	AC 220/380V	AC 220/380V	AC 220/380V	AC 220/380V
Maximum continuous operating voltage U_c (MCOV, The voltage applied to the surge protective device)	AC 320V	AC 320V	AC 320V	AC 320V
Voltage protection level U_p (The voltage level with the surge suppressed)	2.0kV	2.0kV	2.0kV	2.0kV
Maximum discharge current $I_{max}(8/20\mu s)$ kA	40kA	80kA	120kA	160, 200, 240kA
Response time ns	< 5 ns			
Usable ambient temperature $^{\circ}C$	-40 ~ +70 $^{\circ}C$			
Usable frequency Hz	50/60 Hz			
Attachment type	Screw attachment type			
Operation status indication window	Normal operation: Green LED lighting, Abnormal/After an accident: Red lighting			
Dimension(W×H×D)	130×160×80	130×160×80	160×190×86	160×190×86
Product color and shape				
Protection class	Class II / Class III		Class I / Class II / Class III	



Contactors & Overload relays

Metasol MC 18 to 100A

MC type Magnetic Contactors



Frame size				18AF				22AF			
Type				MC-6a	MC-9a	MC-12a	MC-18a	MC-9b	MC-12b	MC-18b	MC-22b [*]
screws clamp terminals				●	●	●	●	●	●	●	●
Number of poles				3pole				3pole			
Rated operational voltage, U _e				690V				690V			
Rated insulation voltage, U _i				690V				690V			
Rated frequency				50/60Hz				50/60Hz			
Rated impulse withstand voltage, U _{imp}				6kV				6kV			
Maximum operating rate in operating cycles per hour(AC3)				1800 operations per hour				1800 operations per hour			
Durability	Mechanical			15 mil. operations				15 mil. operations			
	Electrical			2.5 mil. operations				2.5 mil. operations			
Current and power	AC-1, Thermal current		A	25	25	25	32	25	25	32	40
	AC-3	200/240V	kW	2.5	2.5	3.5	4.5	2.5	3.5	4.5	5.5
			A	9	11	13	18	11	13	18	22
		380/440V	kW	3	4	5.5	7.5	4	5.5	7.5	11
			A	7	9	12	18	9	12	18	22
		500/550V	kW	3	4	7.5	7.5	4	7.5	7.5	15
			A	6	7	12	13	7	12	13	20
		690V	kW	3	4	7.5	7.5	4	7.5	7.5	15
	AC-4	200/240V	kW	1.5	1.5	2.2	3.7	1.5	2.2	3.7	3.7
			A	7	8	11	16	8	11	16	18
		380/440V	kW	2.2	2.2	4	4	2.2	4	4	5.5
			A	5	6	9	11	6	9	11	13
		0.33				0.46					
		45×73.5×82				45×73.5×86					
		0.47				0.47					
45×83×113.7				45×73.5×117.7							
1a or 1b				1a1b							
Auxiliary	Side mount			UA-1				UA-1			
	Front mount			AU-2, AU-4				AU-2, AU-4			

Note) Minimum conduct current of Auxiliary contactor is DC 17V 5mA.

MT type Thermal Overload Relays



Type				MT-12/□		MT-32/□	
Screws clamp terminals				●		●	
Rated operational voltage, U _e				690V		690V	
Rated insulation voltage, U _i				690V		690V	
Rated impulse withstand voltage, U _{imp}				6kV		6kV	
Trip class				10A, 20		10A, 20	
Setting range				0.1~18A		0.1~40A	
Size and weight	Weight	kg		0.17		0.17	
			Size(W×H×D) mm	45×73.2×63.7		45×75×90	

* The safety cover of magnetic contactor and thermal overload relay is optional.



40AF

MC-32a	MC-40a
●	●
3pole	
690V	
1000V	
50/60Hz	
8kV	
1800 operations per hour	
12 mil. operations	
2 mil. operations	
50	60
7.5	11
32	40
15	18.5
32	40
18.5	22
28	32
18.5	22
20	23
4.5	5.5
20	25
7.5	11
17	24
0.55	
69×83×93	
0.77	
69×83×120	
2a2b	
UA-1	
AU-2, AU-4	



MT-32/□

●
690V
690V
6kV
10A, 20
0.1~40A
0.17
45×75×90



65AF

MC-50a	MC-65a
●	●
3pole	
690V	
1000V	
50/60Hz	
8kV	
1800 operations per hour	
12 mil. operations	
2 mil. operations	
70	100
15	18.5
55	65
22	30
50	65
30	33
43	60
30	33
28	35
7.5	11
35	50
15	22
32	47
1.05	
79×106×122	
1.3	
79×106×149	
2a2b	
UA-1	
AU-2, AU-4	



MT-63/□

●
690V
690V
6kV
10A, 20
4~65A
0.31/0.33
55×81×100



100AF

MC-75a	MC-85a	MC-100a
●	●	●
3pole		
690V		
1000V		
50/60Hz		
8kV		
1800 operations per hour		
12 mil. operations		
2 mil. operations		
110	135	160
22	25	30
75	85	105
37	45	55
75	85	105
37	45	55
64	75	85
37	45	45
42	45	65
13	15	19
55	65	80
25	30	37
52	62	75
1.93		
94×140×137		
2.8		
94×140×174		
2a2b		
UA-1		
AU-2, AU-4		



MT-95/□

●
690V
690V
6kV
10A, 20
7~100A
0.48/0.5
70×97×110

Contactors & Overload relays

Metasol MC 4P 150 to 800A

MC type Magnetic Contactors



Frame size				150AF		225AF	
Type				MC-130a	MC-150a	MC-185a	MC-225a
screws clamp terminals				●	●	●	●
Number of poles				3pole		3pole	
Rated operational voltage, Ue				690V		690V	
Rated insulation voltage, Ui				1000V		1000V	
Rated frequency				50/60Hz		50/60Hz	
Rated impulse withstand voltage, Uimp				8kV		8kV	
Maximum operating rate in operating cycles per hour(AC3)				1200 operations per hour		1200 operations per hour	
Durability	Mechanical			5 mil. operations		5 mil. operations	
	Electrical			1 mil. operations		1 mil. operations	
Current and power	AC-1, Thermal current		A	160	210	230	275
	AC-3	200/240V	kW	37	45	55	75
			A	130	150	185	225
		380/440V	kW	60	75	90	110
		A	120	150	185	225	
	500/550V	kW	60	75	110	132	
			A	90	100	180	200
		690V	kW	55	55	110	140
		A	60	60	120	150	
	AC-4	200/240V	kW	22	30	37	45
			A	93	120	150	180
		380/440V	kW	45	55	75	90
		A	90	110	150	180	
	Size and weight		AC control	Weight	kg	2.1	
			Size(W×H×D)	mm	95×158×132		
DC control			Weight	kg	2.1		
			Size(W×H×D)	mm	95×158×132		
Auxiliary(standard)							
Auxiliary	Side mount			UA-1		AU-100 (Max.4NO4NC)	
	Front mount			AU-2, AU-4			

MT type Thermal Overload Relays



Type				MT-150/□	MT-225/□
Screws clamp terminals				●	●
Rated operational voltage, Ue				690V	690V
Rated insulation voltage, Ui				690V	690V
Rated impulse withstand voltage, Uimp				6kV	6kV
Trip class				10A, 20	10A, 20
Setting range				34~150A	65~240A
Size and weight	Weight	kg	Size(W×H×D) mm	0.67	2.5
				95×109×113	147×141×184



400AF

MC-265a	MC-330a	MC-400a
●	●	●
3pole		
690V		
1000V		
50/60Hz		
8kV		
1200 operations per hour		
5 mil. operations		2.5 mil. operations
1 mil. operations		0.5 mil. operations
300	350	450
80	90	125
265	330	400
132	150	200
265	330	400
140	160	200
225	280	350
160	200	250
185	225	300
50	55	75
200	220	300
102	110	150
200	220	300

9.2
163×243×198

AU-100 (Max.4NO4NC)



MT-400/□

●
690V
690V
6kV
10A, 20
85~400A
2.6
151×171×198



800AF

MC-500a	MC-630a	MC-800a
●	●	●
3pole		
690V		
1000V		
50/60Hz		
8kV		
1200 operations per hour		
2.5 mil. operations		
0.5 mil. operations		
580	660	900
147	190	220
500	630	800
250	300	400
500	630	800
250	300	400
400	500	720
300	400	500
380	420	630
90	110	160
350	400	630
176	200	300
350	400	630

22.4
285×312×242

AU-100 (Max.4NO4NC)



MT-800/□

●
690V
690V
6kV
10A, 20
200~800A
11.5
360×530×212

Contactors & Overload relays

Metasol MC 4P 18 to 85A

MC type Magnetic Contactors



Frame size			
Type		Screw clamp terminal	
Number of poles			
Rated operational voltage (Ue)			
Rated insulation voltage (Ui)			
Rated frequency			
Rated impulse withstand voltage, Uimp			
Maximum operating rate in operating cycles per hour(AC1)			
Durability	Mechanical		
	Electrical		
Current and Power	Thermal current		A
	AC-1	200/240V	kW
			A
		380/400V	kW
			A
		500/550V	kW
			A
		690V	kW
			A
UL rating (50/60Hz)	Continuous current		A
	Single Phase	110~120V	HP
		220~240V	HP
		200~208V	HP
	Three Phase	220~240V	HP
		440~480V	HP
		550~600V	HP
	NEMA Size		
Size and weight	AC	Weight	kg
	Control	Size(W×H×D)	mm
	DC	Weight	kg
	Control	Size(W×H×D)	mm
Auxiliary(standard)			
Auxiliary	Side Mount		
	Front Mount		



18AF			
MC-6a/4	MC-9a/4	MC-12a/4	MC-18a/4
●			
4pole			
690V			
690V			
50/60Hz			
6kV			
1800 operations per hour			
15 mil. Operations			
0.5 mil. Operations		0.8 mil. Operations	
25	25	25	40
9	9	9	15
25	25	25	40
17	17	17	27
25	25	25	40
21	21	21	35
25	25	25	40
27	27	27	44
25	25	25	40
25	25	25	32
0.5	0.5	0.75	1
1.5	1.5	2	3
2	2	3	5
3	3	5	7.5
5	5	7.5	10
7.5	7.5	10	15
00	00	0	0
0.33			
45×73.5× 79			
0.5			
45×73.5×110.7			
-			
UA-1			
AU-2, AU-4			



22AF
MC-22a/4
●
4pole
690V
690V
50/60Hz
6kV
1800 operations
15 mil. Operations
1 mil. Operations
40
15
40
27
40
35
40
44
40
32
2
3
7.5
7.5
10
15
1
0.4
47.2×80×86.8
0.5
47.2×80×113.2
-
AU-1
AU-2, AU-4

40AF
MC-32a/4
MC-40a/4
●
4pole
690V
690V
50/60Hz
6kV
1800 operations per hour
15 mil. Operations
1 mil. Operations
50
60
18
22
50
60
35
42
50
60
43
52
50
60
55
66
50
60
45
50
2
3
5
5
7.5
10
10
20
25
20
25
1
1
0.59
59×83.5×94.5
0.7
59×83.5×121
-
AU-1

85AF
MC-50a/4
MC-65a/4
MC-75a/4
MC-85a/4
●
4pole
690V
1000V
50/60Hz
8kV
1800 operations per hour
12 mil. Operations
1 mil. Operations
80
100
110
135
30
37
41
51
80
100
110
135
56
70
76
95
80
100
110
135
70
88
97
120
80
100
110
135
88
110
120
150
80
100
110
135
70
80
90
100
3
5
5
7.5
7.5
10
15
15
10
15
20
25
15
20
25
30
30
40
50
50
30
40
50
50
2
2
2
3
1.2
91×123.5×117.8
1.29
91×123.5×117.8
-
AU-1
AU-2, AU-4

Contactors & Overload relays

Metasol MC 225 to 800A

MC type Magnetic Contactors



Frame size			
Type	Screw clamp terminal		
Number of poles			
Rated operational voltage (Ue)			
Rated insulation voltage (Ui)			
Rated frequency			
Rated impulse withstand voltage, Uimp			
Maximum operating rate in operating cycles per hour(AC1)			
Durability	Mechanical		
	Electrical		
Current and Power	Thermal current		A
	AC-1	200/240V	kW
			A
		380/400V	kW
			A
		500/550V	kW
			A
		690V	kW
UL rating (50/60Hz)	Continuous current		A
	Single Phase	110~120V	HP
		220~240V	HP
		200~208V	HP
	Three Phase	220~240V	HP
		440~480V	HP
		550~600V	HP
	NEMA Size		
Size and weight	AC	Weight	kg
	Control	Size(W×H×D)	mm
	DC	Weight	kg
	Control	Size(W×H×D)	mm
Auxiliary(standard)			
Auxiliary	Side Mount		
	Front Mount		



225AF				
MC-100a/4	MC-130a/4	MC-150a/4	MC-185a/4	MC-225a/4
●				
4pole				
690V				
1000V				
50/60Hz				
8kV				
1200 operations per hour				
15 mil. Operations				
0.8 mil. Operations				
160	165	250	300	330
57	60	76	87	100
150	155	200	230	260
106	110	142	165	185
150	155	200	230	260
132	137	180	205	230
150	155	200	230	260
165	170	225	255	290
150	155	200	230	260
160	160	210	230	275
7.5	10	15	15	15
15	20	25	30	40
30	40	40	60	60
30	40	50	60	75
60	75	100	125	150
60	75	100	125	150
3	3	4	4	4
5.6				
175×203×185				
2a2b				
AU-100				
-				

* - FLA = 722 A, LRA = 5618 A

** - FLA = 566 A, LRA = 4495 A



400AF

MC-265a/4	MC-330a/4	MC-400a/4
●		
4pole		
690V		
1000V		
50/60Hz		
8kV		
1200 operations per hour		
15 mil. Operations		
0.5 mil. Operations		
360	420	500
115	135	160
300	350	420
215	250	300
300	350	420
265	315	375
300	350	420
335	390	470
300	350	420
300	350	450
-	-	-
-	-	-
75	100	125
100	100	150
200	200	300
200	200	300
5	5	5

9.9

206×243×205

2a2b

AU-100

-



800AF

MC-500a/4	MC-630a/4	MC-800a/4
●		
4pole		
690V		
1000V		
50/60Hz		
8kV		
1200 operations per hour		
12 mil. Operations		
0.5 mil. Operations		
630	750	900
245	255	310
630	660	800
450	470	570
630	660	800
560	590	710
630	660	800
710	740	900
630	660	800
580	660	900
-	-	-
-	-	-
150	200	200
200	250	300
400	500	600 *
400	500	600 **
6	6	7

26.3

346×310×244

2a2b

AU-100

-

Mini contactors

6 to 16A

Mini contactors

3NO main contacts
1 auxiliary contacts



Screw clamp type



Fast-on type



Cage clamp type



Solder pin type

Frame size		6A		9A		12A		16A	
Screw clamp type	AC coil	GMC-6M		GMC-9M		GMC-12M		GMC-16M	
	DC coil	GMD-6M		GMD-9M		GMD-12M		GMD-16M	
Fast-on type	AC coil	GMC-6MF		GMC-9MF		GMC-12MF		GMC-16MF	
	DC coil	GMD-6MF		GMD-9MF		GMD-12MF		GMD-16MF	
Cage clamp type	AC coil	GMC-6MC		GMC-9MC		GMC-12MC		GMC-16MC	
	DC coil	GMD-6MC		GMD-9MC		GMD-12MC		GMD-16MC	
Solder pin type	AC coil	GMC-6MP		GMC-9MP		GMC-12MP		GMC-16MP	
	DC coil	GMD-6MP		GMD-9MP		GMD-12MP		GMD-16MP	
Ratings / IEC60947-4		kW	A	kW	A	kW	A	kW	A
AC1		20		20		20		20	
AC3	200/240V	1.5	7	2.2	9	3	12	4	15
	380/440V	2.2	6	4	9	5.5	12	7.5	16
	500/550V	3	5	3.7	6	4	7	5.5	9
	690V	3	4	4	5	4	5	4	5
Ratings / UL508		hp	A	hp	A	hp	A	hp	A
continuous current		lth = 20A (maximum for cage clamp type is 10A)							
single phase	120V	1/2		1/2		1 *		-	
	230V/240V	1		1.5		2 **		-	
three phase	240V	1.5		3		3		-	
	480V	3		5		7.5 ***		-	
	600V	3		5		7.5		-	
Wire Range : Copper, 75°C, Stranded, 18-12AWG									
NEMA size		00		00		00		0	

Additional auxiliary contacts	Screw clamp type	Fast-on type	Cage clamp type	Solder pin type
2-pole, Front mount	AU-2M	AU-2MF	AU-2MC	
4-pole, Front mount	AU-4M	AU-4MF	AU-4MC	AU-1MP
2-pole, Side mount	AU-1M	AU-1MF	AU-1MC	

Note) * = 1/2 for cage clamp type, ** = 1.5hp for cage clamp type, *** = 5hp for cage clamp type
16AF : not approved from UL

Overload Relays

Bimetallic style Type GT	 GT-12M			Setting ranges (A)	0.1 - 0.16 0.16 - 0.25 0.25 - 0.4 0.4 - 0.63 0.63 - 1 1 - 1.6 1.6 - 2.5 2.5 - 4	4 - 6 5 - 8 6 - 9 7 - 10 9 - 13 12 - 16		Base for separate mount
	Differential	GTK-12M						
	Non-differential (3-heater)	GTH-12M/3						
	Non-differential (2-heater)	GTH-12M						

Digital motor protection relay



Model No.			DMP06-S/Sa	DMP60-S/Sa	DMP06-T/Ta	DMP60-T/Ta
Wiring			Screw type		Tunnel type	
Panel mount			Unit or Extension Note1)			
Operation time			Select either reverse time characteristics or definite time characteristics			
Protection	Over current		According to the setting time			
	Phase failure		3 sec.			
	Reverse phase		Within 0.1 sec.			
	Asymmetry		5 sec.			
	Stall		5 sec.			
	Lock		Within 0.5 sec.			
	Under current		3 sec.			
	Ground fault		Within 0.05~1 sec. Selectable (0.05~1.0sec)			
	Short circuit Note2)		Within 50ms			
Alarm			Variable (60~110% of the setting current)			
Current setting range (A)			0.5~6	5~60	0.5~6	5~60
Motor capacity (kW)	220~240V		0.09~0.75	1.1~11	0.09~0.75	1.1~11
	380~440V		0.12~1.5	2.2~22	0.09~1.5	2.2~22
Time setting range (sec)	Definite time	Delay in starting	0~60sec			
		Delay in operating	0~30sec			
	Inverse time		0~60sec			
	Reset		Manual reset			
Tolerance		Current	±5%			
		Time	±5% (or±0.5sec)			
Operating power Note3)		Voltage	AC 190~250V			
		Frequency	60Hz (50Hz)			
Aux. contact	OL	2-SPST	3A/250Vac Resistive load			
	AL	SPST	3A/250Vac Resistive load			
Insulation resistance			Over DC500V 100MΩ			
Surge impulse voltage(IEC1000-4-5)			1.2×50 _μ S 6kV (Apply standard wave form)			
Fast transient burst(IEC1000-4-4)			2.5kV/5min			
Environment	Temperature	Operation	-25~70℃			
		Storage	-30~80℃			
	Humidity		30~90% RH (No freezing)			
Display	7-Segment		3 phase current, cause of a fault			
	Bar-Graph		60~110% of real load current			
Mounting type			35mm Din-rail/Panel			

Note1) In extension type, the digital EMPR is calibrated with combining the display part and main body so, please cautious not to combine the display part and main body with different part No.

Note2) Instantaneous short circuit protection is optional

Note3) Operational voltage of AC 110V and 50Hz is optional

Manual motor starters

Quick selection table ... IEC rating



Frame			32AF																					
Type	Current adjustable type		MMS-32S										MMS-32H											
	Instantaneous type		-										MMS-32HI											
Breaking capacity			Standard										High breaking											
Handle Type			Toggle										Rotary											
Number of poles			3										3											
Rated operational voltage (Ue)			Up to 690V										Up to 690V											
Rated frequency			50/60 Hz										50/60 Hz											
Rated insulation voltage (Ui)			690V										690V											
Rated impulse voltage (Uimp)			6kV										6kV											
Utilization category	IEC 60 947-2 (Breaker)		Cat. A										Cat. A											
	IEC 60 947-4 (Motor starter)		AC 3										AC 3											
Mechanical endurance (Operating)			100,000										100,000											
Electrical endurance (Cycles)			100,000										100,000											
Max operating frequency per hour (Ope./h)			25										25											
Temperature compensation (Operation)			-20 ~ +60℃										-20 ~ +60℃											
Instantaneous short circuit release			13 × Ie max.										13 × Ie max.											
Overload protection			○										○											
Phase failure function			○										○											
Trip indicating function			×										×											
Test function			○										○											
Dimension(W×H×D)			45×105×54.4										45×105×60.3											
Weight (g)			320										360											
Rated breaking capacity (kA)	Rated operational current (Ie)	Thermal release Adjustment range (A)	220V 240V 230V		415V 400V		460V 440V		525V 500V		690V 600V		220V 240V 230V		415V 400V		460V 440V		525V 500V		690V 600V			
			Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics		
			0.16	0.1~0.16	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	
			0.25	0.16~0.25	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	
			0.4	0.25~0.4	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	
			0.63	0.4~0.63	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	
			1	0.63~1	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	
			1.6	1~1.6	100	100	100	100	100	100	100	100	3	3	100	100	100	100	100	100	100	100	100	
			2.5	1.6~2.5	100	100	100	100	100	100	50	38	3	3	100	100	100	100	100	100	100	8	8	
			4	2.5~4	100	100	100	100	50	38	15	11	3	3	100	100	100	100	100	100	100	8	8	
			6	4~6	100	100	100	100	15	11	10	8	3	3	100	100	100	100	100	100	100	6	6	
			8	5~8	100	100	100	100	15	11	10	8	3	3	100	100	100	100	50	38	50	38	6	6
			10	6~10	100	100	50	38	15	11	6	5	3	3	100	100	100	100	50	38	50	38	6	6
			13	9~13	100	100	50	38	10	8	6	5	3	3	100	100	100	100	50	38	42	32	6	6
			17	11~17	50	38	20	15	10	8	6	5	3	3	100	100	50	38	20	15	10	8	4	4
			22	14~22	40	30	15	11	8	6	6	5	3	3	100	100	50	38	20	15	10	8	4	4
			26	18~26	40	30	15	11	8	6	6	5	3	3	100	100	50	38	20	15	10	8	4	4
			32	22~32	30	22	15	11	6	4	5	4	3	3	100	100	50	38	20	15	10	8	4	4
			40	28~40	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
			50	34~50	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
			63	45~63	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
			75	55~75	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
			90	70~90	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
			100	80~100	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



63AF																		100AF																					
MMS-63S										MMS-63H								MMS-100S									MMS-100H												
-										MMS-63HI								-									MMS-100HI												
Standard										High breaking								Standard									High breaking												
Rotary										Rotary								Rotary									Rotary												
3										3								3									3												
Up to 690V										Up to 690V								Up to 690V									Up to 690V												
50/60 Hz										50/60 Hz								50/60 Hz									50/60 Hz												
1,000V										1,000V								1,000V									1,000V												
8kV										8kV								8kV									8kV												
Cat. A										Cat. A								Cat. A									Cat. A												
AC 3										AC 3								AC 3									AC 3												
50,000										50,000								50,000									50,000												
25,000										25,000								25,000									25,000												
25										25								25									25												
-20 ~ +60℃										-20 ~ +60℃								-20 ~ +60℃									-20 ~ +60℃												
13 × Ie max.										13 × Ie max.								13 × Ie max.									13 × Ie max.												
○										○								○									○												
○										○								○									○												
×										×								○									○												
○										○								○									○												
55 × 125 × 112.3										55 × 125 × 112.3								70 × 165 × 138									70 × 165 × 138												
1,000										1,000								2,200									2,200												
220V 240V 230V	415V 400V	460V 440V	525V 500V	690V 600V	220V 240V 230V	415V 400V	460V 440V	525V 500V	690V 600V	220V 240V 230V	415V 400V	460V 440V	525V 500V	690V 600V	220V 240V 230V	415V 400V	460V 440V	525V 500V	690V 600V	220V 240V 230V	415V 400V	460V 440V	525V 500V	690V 600V	220V 240V 230V	415V 400V	460V 440V	525V 500V	690V 600V										
Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics								
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-									
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-									
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-									
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-									
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-									
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-									
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-									
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-									
100	100	100	100	15	12	10	8	4	3	100	100	100	100	50	38	50	38	6	5	-	-	-	-	-	-	-	-	-	-	-	-								
100	100	50	38	10	8	6	5	4	3	100	100	100	100	50	38	42	32	6	5	-	-	-	-	-	-	-	-	-	-	-	-								
100	100	25	19	10	8	6	5	4	3	100	100	50	50	50	38	12	9	5	5	100	100	50	38	40	30	25	19	10	8	100	100	100	100	50	38	35	27	12	9
50	38	25	19	10	8	6	5	4	3	100	100	50	50	50	38	12	9	5	5	100	100	50	38	40	30	25	19	10	8	100	100	100	50	38	35	27	12	9	
50	38	25	19	10	8	6	5	4	3	100	100	50	50	35	27	12	9	5	5	100	100	50	38	40	30	25	19	10	8	100	100	100	50	38	35	27	12	9	
50	38	25	19	10	8	6	5	4	3	100	100	50	50	35	27	10	8	5	5	100	100	50	38	40	30	15	11	10	8	100	100	100	50	38	25	19	12	9	
50	38	25	19	10	8	6	5	4	3	100	100	50	50	35	27	10	8	5	5	100	100	50	38	40	30	15	11	6	5	100	100	100	50	38	20	15	12	9	
50	38	25	19	10	8	6	5	4	3	100	100	50	50	35	27	10	8	5	5	100	100	50	38	40	30	12	9	6	5	100	100	100	50	38	15	11	10	8	
50	38	25	19	10	8	6	5	4	3	100	100	50	50	35	27	10	8	5	5	100	100	50	38	40	30	12	9	6	5	100	100	100	50	38	15	11	8	6	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	100	100	50	38	40	30	8	6	5	4	100	100	75	50	38	12	9	6	6	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	100	100	50	38	40	30	8	6	5	4	100	100	75	50	38	12	9	6	6	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	100	100	50	38	40	30	8	6	5	4	100	100	75	50	38	12	9	6	6	

Mold case circuit breakers

Susol MCCB Series

			TD100			TD160			TS100		
Frame size [AF]			100			160			100		
Rated current, In [*] [A]			16, 20, 25, 32, 40, 50, 63, 80, 100			1P: 16, 20, 25, 32, 40, 50, 63, 80, 100, 125, 160 2, 3P: 100, 125, 160			40, 50, 63, 80, 100		
No. of poles			2 [*] , 3, 4			1, 2 [*] , 3, 4			2 [*] , 3, 4		
Rated operational voltage, Ue		AC [V]	690			240(1P), 690			690		
		DC [V]	500			250(1P), 500			500		
Rated impulse withstand voltage, Uimp [kV]			8			8			8		
Rated insulation voltage, Ui [V]			750			750			750		
Rated ultimate short-circuit breaking capacity, Icu			N	H	L	N	H	L	N	H	L
AC 50/60Hz		220/240V [kA]	85	100	200	30(1P) 85	50(1P) 100	200	100	120	200
		380/415V [kA]	50	85	150	50	85	150	50	85	150
		440/460V [kA]	50	70	130	50	70	130	50	70	130
		480/500V [kA]	30	50	65	30	50	65	42	65	85
		660/690V [kA]	5	8	10	5	8	10	10	15	20
DC		250V [kA]	42	65	100	16(1P) 42	25(1P) 65	100	50	85	100
		500V(2poles in series) [kA]	42	65	100	42	65	100	50	85	100
Rated service breaking capacity, Ics [%Icu]			100%	100%	100%	100%	100%	100%	100%	100%	100%
Rated short-circuit making capacity Icm											
AC 50/60Hz		220/240V [kA]	187	220	440	105(1P) 187	105(1P) 220	440	220	264	440
		380/415V [kA]	105	187	330	105	187	330	105	187	330
		440/460V [kA]	105	154	286	105	154	286	105	154	286
		480/500V [kA]	63	105	143	63	105	143	88	143	187
		660/690V [kA]	8	14	17	8	14	17	17	30	40
Category of utilization			A			A			A		
Isolation behavior			●			●			●		
Trip unit (release)											
Thermal-Magnetic											
●fixed-thermal, fixed-magnetic		FTU	●			●			●		
●adjustable-thermal, fixed-magnetic		FMU	●			●****			●		
●adjustable-thermal, adjustable-magnetic		ATU	-			-			-		
●magnetic only		MTU ***	-			-			●		
Electronic											
●LSI		ETS ***	-			-			●		
●LSI		ETM ***	-			-			-		
Option	Earth-fault protection, Ig		-			-			-		
	Zone selective interlocking, ZSI		-			-			-		
	Ammeter		-			-			-		
	Communication		-			-			-		
	Earth-leakage protection module ****		-			-			-		
Connection	fixed	front-connection	●			●			●		
		rear-connection	●			●****			●		
	plug-in	front-connection	●			●****			●		
		rear-connection	●			●****			●		
Mechanical life [operations]			25000			25000			25000		
Electrical life @ 415 V AC [operations]			10000			10000			10000		
Basic dimensions, W×H×D (front connection)		1-pole [mm]	-			35×140×86			-		
		3-pole [mm]	90×140×86			90×140×86			105×160×86		
		4-pole [mm]	120×140×86			120×140×86			140×160×86		
Weight (front connection)		1-pole [kg]	-			0.57			-		
		3-pole [kg]	1.5			1.5			2		
		4-pole [kg]	1.8			1.8			2.6		
Reference standard			IEC60947-2			IEC60947-2			IEC60947-2		

Note) 1. ● applicable or available
2. ▲ available as a separate breaker

* Applicable to MCCBs equipped with FTU, FMU, ATU
* 2 pole MCCB in 3pole frame size
*** 700A only available for TS800FTU
*** Available for 3pole circuit breakers
**** Under development
**** Not applicable to 1pole

1. The breakers with electronic trip units are available only at 3-pole version. (Only for AC supply)
※ The trip unit ATU is available from 125A



TS160			TS250			TS400			TS630			TS800		
160			250			400			630			800		
(100)*, 125, 160			125, 160, 200, 250			300, 400			500, 630			700**, 800		
2*, 3, 4			2*, 3, 4			2*, 3, 4			2*, 3, 4			2*, 3, 4		
690			690			690			690			690		
500			500			500			500			500		
8			8			8			8			8		
750			750			750			750			750		
N	H	L	N	H	L	N	H	L	N	H	L	N	H	L
100	120	200	100	120	200	100	120	200	100	120	200	100	120	200
50	85	150	50	85	150	65	85	150	65	85	150	65	100	150
50	70	130	50	70	130	65	85	130	65	85	130	65	100	130
42	65	85	42	65	85	42	65	85	42	65	85	42	85	100
10	15	20	10	15	20	10	20	35	10	20	35	10	20	35
50	85	100	50	85	100	50	85	100	50	85	100	50	85	100
50	85	100	50	85	100	50	85	100	50	85	100	50	85	100
100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%
220	264	440	220	264	440	220	264	440	220	264	440	220	264	440
105	187	330	105	187	330	143	187	330	143	187	330	143	220	330
105	154	286	105	154	286	143	187	286	143	187	286	143	220	286
88	143	187	88	143	187	88	143	187	88	143	187	88	187	220
17	30	40	17	30	40	17	40	74	17	40	74	17	40	74
A			A			A			A			A		
●			●			●			●			●		
●			●			●			●			●		
●			●			●			●			●		
●			●			●			●			●		
●			●			●			●			●		
●			●			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-											

Molded case circuit breakers

Metasol 30AF to 250AF Series

Frame Size(AF)		30	50			60	
Type		S-Type	N-Type	S-Type	H-Type	N-Type	S-Type
Type and Pole	2 pole	ABS32c	ABN52c	ABS52c	ABH52c	ABN62c	ABS62c
	3 pole	ABS33c	ABN53c	ABS53c	ABH53c	ABN63c	ABS63c
	4 pole	ABS34c	ABN54c	ABS54c	ABH54c	ABN64c	ABS64c
Rated current, I _n	A	(3, 5, 10) 15, 20, 30	15, 20, 30, 40, 50			15, 20, 30, 40, 50, 60	
Rated operational voltage, U _e	AC(V)	690	690	690	690	690	690
	DC(V)	500	500	500	500	500	500
Rated insulation voltage, U _i	V	750	750	750	750	750	750
Rated impulse withstand voltage, U _{imp}	kV	8	8	8	8	8	8
Rated short-circuit breaking capacity(I _{cu}) kA (Sym), KSC8321, IEC 60947-2							
AC	690V	2.5	2.5	5	10	2.5	5
	480/500V	7.5	7.5	10	35	7.5	10
	415/460V	14 (10)	14	18	50	14	18
	380V	18 (14)	18	22	50	18	22
	220/250V	30 (25)	30	35	100	30	35
DC	500V(3P)	5	5	10	30	5	10
	250V(2P)	5	5	10	30	5	10
Service breaking capacity(%I _{cu}), I _{cs}		100	100	100	100	100	100
Category of use		A	A	A	A	A	A
Endurance (Number of operations)	Mechanical						
	Electrical						
Type of trip unit							
Thermal-magnetic release		fixed	fixed	fixed	fixed	fixed	fixed
Hydraulic-magnetic release							
Magnetic release only without thermal trip							
Earth leakage protection	for 3 pole	▲	▲	▲	▲	▲	▲
Accessories							
Electrical auxiliaries	Auxiliary switch	●	●	●	●	●	●
	Alarm switch	●	●	●	●	●	●
	Shunt trip	●	●	●	●	●	●
	Undervoltage trip	●	●	●	●	●	●
External accessories	Direct rotary handle	●	●	●	●	●	●
	Extended rotary handle	●	●	●	●	●	●
	Terminal shield	●	●	●	●	●	●
	Insulation barrier	●	●	●	●	●	●
	Rear connection	●	●	●	●	●	●
	Pad handle lock	●	●	●	●	●	●
	Plug-in device	●	●	●	●	●	●
Dimensions (mm)	W×H×D (3P)	75×130×60	75×130×60		90×155×60	75×130×60	
Weight(kg)	2 pole	0.5	0.5	0.5	0.7	0.5	0.5
	3 pole	0.7	0.7	0.7	1	0.7	0.7
	4 pole	0.9	0.9	0.9	1.2	0.9	0.9

Note) 1. ● applicable or available
2. ▲ available as a separate breaker



100		125		250	
N-Type	S-Type	H-Type	N-Type	S-Type	H-Type
ABN102c	ABS102c	ABH102c	ABN202c	ABS202c	ABH202c
ABN103c	ABS103c	ABH103c	ABN203c	ABS203c	ABH203c
ABN104c	ABS104c	ABH104c	ABN204c	ABS204c	ABH204c
15, 20, 30, 40, 50, 60, 75, 100	15, 20, 30, 40, 50, 60, 75, 100, 125		100, 125, 150, 175, 200, 225, 250		
690	690	690	690	690	690
500	500	500	500	500	500
750	750	750	750	750	750
8	8	8	8	8	8
5	8	10	8	8	10
10	25	30	18	26	30
18	37	50	26	37	50
22	42	50	30	42	50
35	85	100	65	85	100
10	20	30	10	20	30
10	20	30	10	20	30
100	100	100	100	100	100
A	A	A	A	A	A
fixed	fixed	fixed	fixed	fixed	fixed
▲	▲	▲	▲	▲	▲
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
75 × 130 × 60	90 × 155 × 60		105 × 165 × 60		
0.5	0.7	0.7	1.1	1.1	1.1
0.7	1	1	1.2	1.2	1.2
0.9	1.2	1.2	1.6	1.6	1.6

	Amb. Temp.	-5°C	0°C	10°C	20°C	25°C	30°C	35°C	40°C	45°C	50°C
Calibrated for 40°C	In=15 to 30	111.9%	111.3%	110.0%	108.0%	106.6%	104.9%	102.7%	100.0%	96.8%	93.3%
	In=40 to 100	110.2%	109.8%	108.7%	107.0%	105.8%	104.3%	102.4%	100.0%	97.2%	94.0%
	In=100 to 225	114.3%	113.2%	110.6%	107.5%	105.8%	104.0%	102.0%	100.0%	97.9%	95.6%
	In=250 to 800	110.0%	109.0%	107.0%	105.0%	104.0%	103.0%	101.5%	100.0%	98.5%	97.0%

Molded case circuit breakers

Metasol 400AF to 800AF Series

Frame Size(AF)		400			
Type		N-Type	S-Type	H-Type	L-Type
Type and Pole	2 pole	ABN402c	ABS402c	ABH402c	ABL402c
	3 pole	ABN403c	ABS403c	ABH403c	ABL403c
	4 pole	ABN404c	ABS404c	ABH404c	ABL404c
Rated current, In	A	250, 300, 350, 400			
Rated operational voltage, Ue	AC(V)	690	690	690	690
	DC(V)	500	500	500	500
Rated insulation voltage, Ui	V	750	750	750	750
Rated impulse withstand voltage, Uimp	kV	8	8	8	8
Rated short-circuit breaking capacity(Icu) kA (Sym), KSC8321, IEC 60947-2					
AC	690V	5	8	10	14
	480/500V	18	35	50	65
	415/460V	37	50	65	85
	380V	42	65	70	100
	220/250V	50	75	85	125
DC	500V(3P)	10	20	40	40
	250V(2P)	10	20	40	40
Service breaking capacity(%Icu), Ics		100	100	100	75
Category of use		A	A	A	A
Endurance (Number of operations)	Mechanical				
	Electrical				
Type of trip unit					
Thermal-magnetic release		fixed	fixed	fixed	fixed
Hydraulic-magnetic release					
Magnetic release only without thermal trip					
Earth leakage protection	for 3 pole	▲	▲	▲	▲
Accessories					
Electrical auxiliaries	Auxiliary switch	●	●	●	●
	Alarm switch	●	●	●	●
	Shunt trip	●	●	●	●
	Undervoltage trip	●	●	●	●
External accessories	Direct rotary handle	●	●	●	●
	Extended rotary handle	●	●	●	●
	Terminal shield	●	●	●	●
	Insulation barrier	●	●	●	●
	Rear connection	●	●	●	●
	Mechanical interlock	●	●	●	●
	Plug-in device	●	●	●	●
Dimensions (mm)	W×H×D (3P)	140×257×109			
Weight(kg)	2 pole	5.2	5.2	5.2	5.2
	3 pole	6.2	6.2	6.2	6.2
	4 pole	7.8	7.8	7.8	7.8

Note) 1. ● applicable or available
2. ▲ available as a separate breaker



800

N-Type	S-Type	L-Type
ABN802c	ABS802c	ABL802c
ABN803c	ABS803c	ABL803c
ABN804c	ABS804c	ABL804c
500, 630, 700, 800		
690	690	690
500	500	500
750	750	750
8	8	8
8	10	14
25	45	65
37	65	85
45	75	100
50	85	125
10	20	40
10	20	40
100	100	75
A	A	A
fixed	fixed	fixed
▲	▲	▲
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
210×280×109		
11	11	11
11.5	11.5	11.5
18.2	18.2	18.2

Amb. Temp.	-5°C	0°C	10°C	20°C	25°C	30°C	35°C	40°C	45°C	50°C
Calibrated for 40°C										
In=15 to 30	111.9%	111.3%	110.0%	108.0%	106.6%	104.9%	102.7%	100.0%	96.8%	93.3%
In=40 to 100	110.2%	109.8%	108.7%	107.0%	105.8%	104.3%	102.4%	100.0%	97.2%	94.0%
In=100 to 225	114.3%	113.2%	110.6%	107.5%	105.8%	104.0%	102.0%	100.0%	97.9%	95.6%
In=250 to 800	110.0%	109.0%	107.0%	105.0%	104.0%	103.0%	101.5%	100.0%	98.5%	97.0%

Earth Leakage Circuit Breakers

Metasol 30AF to 250AF Series

Frame Size(AF)		30	50			60	
Type		S-Type	N-Type	S-Type	H-Type	N-Type	S-Type
Type and Pole	2-pole	-	EBN52c	-	-	-	-
	3-pole	EBS33c	EBN53c	EBS53c	EBH53c	EBN63c	EBS63c
	4-pole	EBS34c	-	EBS54c	EBH54c	-	EBS64c
Protective function		Overload, Short-circuit and Ground fault	Overload, Short-circuit and Ground fault		Overload, Short-circuit and Ground fault	Overload, Short-circuit and Ground fault	
Rated current, In A		15, 20, 30	15, 20, 30, 40, 50		15, 20, 30, 40, 50	60	
Rated residual current, I△n	mA	30, 100/200/500	30, 100/200/500		30, 100/200/500	30,100/200/500	
Rated operational voltage, Ue	AC(V)	220/460	220/460		220/460	220/460	
Rated impulse withstand voltage, Uimp	kV	6	6		6	6	
Residual current off-time at I△n	sec	≤0.1 sec	≤0.1 sec		≤0.1 sec	≤0.1 sec	
Rated short-circuit breaking capacity (Icu) kA (Sym), KSC8321, IEC 60947-2							
AC	460V	14	14	18	50	14	18
	415V	14	14	18	50	14	18
	220/250V	30	30	35	100	30	35
Service breaking capacity(%Icu), Ics		100	100	100	100	100	100
Category of use		A	A	A	A	A	A
Endurance	Mechanical	25000	25000	25000	25000	25000	25000
(Number of operations)	Electrical	10000	10000	10000	10000	10000	10000
Type of trip unit							
Thermal-magnetic release		fixed	fixed	fixed	fixed	fixed	fixed
Hydraulic-magnetic release							
Magnetic release only without thermal trip							
Earth leakage protection	for 3 pole	▲	▲	▲	▲	▲	▲
Accessories							
Electrical auxiliaries	Auxiliary switch	●	●	●	●	●	●
	Alarm switch	●	●	●	●	●	●
	Shunt trip						
	Undervoltage trip						
External accessories	Insulation barrier	●	●	●	●	●	●
	Terminal cover (Long)	●	●	●	●	●	●
	Terminal cover (Short)	●	●	●	●	●	●
	Rotary handle (Direct)	●	●	●	●	●	●
	Rotary handle (Direct, Key lock)	●	●	●	●	●	●
	Rotary handle (Extended)	●	●	●	●	●	●
	Rear terminal (Bar)				●	●	●
	Rear terminal (Round)	●	●	●	●	●	●
	Plug-in kit	●	●	●	●	●	●
	Pad handle lock	●	●	●	●	●	●
Dimensions (mm)	W×H×D (3P)	75×130×60	75×130×60		90×155×60	75×130×60	
Weight(kg)	2 pole	-	0.5	-	-	-	-
	3 pole	0.7	0.7	0.7	1	0.7	0.7
	4 pole	0.9	-	0.9	1.2	-	0.9

Note) 1. ● applicable or available
2. ▲ available as a separate breaker



100	125		250		
N-Type	S-Type	H-Type	N-Type	S-Type	H-Type
EBN102c	-	-	EBN202c	-	-
EBN103c	EBS103c	EBH103c	EBN203c	EBS203c	EBH203c
EBN104c	EBS104c	EBH104c	-	EBS204c	EBH204c
Overload, Short-circuit and Ground fault	Overload, Short-circuit and Ground fault		Overload, Short-circuit and Ground fault		
60, 75, 100	15, 20, 30, 40, 50, 60, 75, 100, 125		100, 125, 150, 175, 200, 225, 250		
30, 100/200/500	30, 100/200/500		30, 100/200/500		
220/460	220/460		220/460		
6	6		6		
≤0.1 sec	≤0.1 sec		≤0.1 sec		
18	37	50	26	37	50
18	37	50	26	37	50
35	85	100	65	85	100
100	100	100	100	100	
A	A	A	A	A	
25000	25000	25000	20000	20000	20000
10000	10000	10000	5000	5000	5000
fixed	fixed	fixed	fixed	fixed	fixed
▲	▲	▲	▲	▲	▲
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
75 × 130 × 60	90 × 155 × 60		105 × 165 × 60		
0.5	-	-	1.1	-	-
0.7	1	1	1.2	1.2	1.2
0.9	1.2	1.2	-	1.5	1.5

Earth Leakage Circuit Breakers

Metasol 400AF to 800AF Series

Frame Size(AF)		400			
Type		N-Type	S-Type	H-Type	L-Type
Type and Pole	3-pole	EBN403c	EBS403c	EBH403c	EBL403c
	4-pole	EBN404c	EBS404c	EBH404c	EBL404c
Protective function		Overload, Short-circuit and Ground fault			
Rated current, I _n A		250, 300, 350, 400			
Rated residual current, I _{Δn} mA		30, 100/200/500mA			
Rated operational voltage, U _e AC(V)		220/460	220/460	220/460	220/460
Rated impulse withstand voltage, U _{imp} kV		6	6	6	6
Residual current off-time at I _{Δn} sec		0.1 sec	0.1 sec	0.1 sec	0.1 sec
Rated short-circuit breaking capacity (I _{cu}) kA (Sym), KSC8321, IEC 60947-2					
AC	415/460V	37	50	65	85
	220/250V	50	75	85	125
Service breaking capacity(%I _{cu}), I _{cs}		100	100	100	75
Category of use		A	A	A	A
Endurance (Number of operations)	Mechanical	40000	40000	40000	40000
	Electrical	10000	10000	10000	10000
Type of trip unit					
Thermal-magnetic release		fixed	fixed	fixed	fixed
Hydraulic-magnetic release					
Magnetic release only without thermal trip					
Earth leakage protection	for 3 pole	▲	▲	▲	▲
Accessories					
Electrical auxiliaries	Auxiliary switch	●	●	●	●
	Alarm switch	●	●	●	●
	Shunt trip	●	●	●	●
	Undervoltage trip	●	●	●	●
External accessories	Insulation barrier	●	●	●	●
	Terminal cover (Long) - 2, 3pole	●	●	●	●
	Terminal cover (Long) - 4pole	●	●	●	●
	Rotary handle (Direct)	●	●	●	●
	Rotary handle (Extended)	●	●	●	●
	Mechanical interlock - 2, 3pole	●	●	●	●
	Mechanical interlock - 4pole	●	●	●	●
	Rear terminal - 2pole	●	●	●	●
	Rear terminal - 3pole	●	●	●	●
	Rear terminal - 4pole	●	●	●	●
	Plug-in kit	●	●	●	●
Dimensions (mm)	W×H×D (3P)	140×257×109			
Weight(kg)	2 pole	-	-	-	-
	3 pole	7	7	7	7
	4 pole	8.4	8.4	7	7

Note) 1. ● applicable or available
2. ▲ available as a separate breaker



800		
N-Type	S-Type	L-Type
EBN803c	EBS803c	EBL803c
-	-	-
Overload, Short-circuit and Ground fault		
500, 630, 700, 800		
30, 100/200/500mA		
220/460	220/460	220/460
6	6	6
0.1 sec	0.1 sec	0.1 sec
37	65	85
50	85	125
100	100	75
A	A	A
2500	2500	2500
500	500	500
fixed	fixed	fixed
▲	▲	▲
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
210×280×109		
-	-	-
-	-	-

Air circuit breakers

Susol ACB Series



Type			
Ampere frame		(AF)	
Rated current(A)	(In max)	at 40℃	
Setting current (A) *	Control trip relay (... × In max)		
Rated current of neutral pole (A)			
Rated insulation voltage (V)	(Ui)		
Rated operating voltage (V)	(Ue)		
Rated impulse withstand voltage (kV)	(Uimp)		
Frequency (Hz)			
Number of poles (P)			
Rated breaking capacity (kA sym)		220V/230V/380V/415V	
IEC 60947-2	(Icu)	460V/480V/500V	
AC 50/60Hz		550V/600V/690V	
Rated service breaking capacity (kA)	(Ics)	... % × Icu	
Rated making capacity (kA peak)		220V/230V/380V/415V	
IEC 60947-2	(Icm)	460V/480V/500V	
AC 50/60Hz		550V/600V/690V	
Rated short-time		1sec	
withstand current (kA) (Icw)		2 sec	
		3 sec	
Operating time (ms)		Maximum total breaking time	
		Maximum closing time	
Life cycle (time)	Mechanical	Without maintenance	
		With maintenance	
	Electrical	Without maintenance	
		With maintenance	
Connections **	Draw-out / Fixed	Horizontal connection	
		Vertical connection	
		Front connection	
		Mixed connection	
Weight (kg) (3P/4P)	Draw-out type	Main body (With cradle)	Motor charging type
			Manual charging type
	Fixed type	Cradle only	
			Motor charging type
			Manual charging type
External dimensions (mm) (H×W×D)		Draw-out type	3P
			4P
		Fixed type	3P
			4P
Trip relay			
Certificate & Approval			
Marine classification			



Susol					
AH-06D	AH-08D	AH-10D	AH-13D	AH-16D	AH-20D
630	800	1000	1250	1600	2000
200	400				
400	630	1000	1250	1600	2000
630	800				
(0.4 ~ 1.0) × In max					
400	400				
630	630	1000	1250	1600	2000
	800				
1000					
690					
12					
50/60					
3, 4					
85					
85					
65					
100%					
187					
187					
143					
65					
60					
50					
40					
80					
20,000					
30,000					
5,000					
10,000					
				●	-
				○	●
				○	-
				○	-
				○	-
				63/74	70/85
				61/72	68/83
				29/32	33/40
				34/44	38/47
				32/42	36/45
430 × 334 × 375					
430 × 419 × 375					
300 × 300 × 295					
300 × 385 × 295					
N, A, P, S type					
KS / KEMA / KERI / GOST					
LR, ABS, DNV, KR, BV, GL, RINA, NK					

* Refer to trip relay specification. ** ●: Standard, ○: Option



Susol								
AH-06E	AH-08E	AH-10E	AH-13E	AH-16E	AH-20E	AH-25E	AH-32E	AH-40E
630	800	1000	1250	1600	2000	2500	3200	4000
630	800	1000	1250	1600	2000	2500	3200	4000
(0.4 ~ 1.0) × In max								
630	800	1000	1250	1600	2000	2500	3200	4000
1,000								
690								
12								
50/60								
3, 4								
100								
100								
85								
100%								
220								
220								
187								
85								
75								
65								
40								
80								
15,000								
20,000								
5,000								
10,000								
●								○
○								●
○								-
○								-
87/103								104/147
85/101								102/145
44/55								58/70
44/55								63/100
42/53								61/98
430×412×375								
430×527×375								
300×378×295								
300×493×295								
N, A, P, S type								
KS / KEMA / KERI / GOST								
LR, ABS, DNV, KR, BV, GL, RINA, NK								

Susol		
AH-40G	AH-50G	AH-63G
4000	5000	6300
4000	5000	6300
(0.4 ~ 1.0) × In max		
4000	5000	6300
1,000		
690		
12		
50/60		
3, 4		
150		
150		
100		
100%		
330		
330		
220		
100		
100		
100		
40		
80		
10,000		
15,000		
2,000		
5,000		
○		●
●		-
-		-
181/223		186/230
179/221		184/228
97/117		102/124
98/123		103/130
96/121		101/128
460 × 785 × 375		
460 × 1015 × 375		
300 × 751 × 295		
300 × 981 × 295		
N, A, P, S type		
KS / KEMA / KERI / GOST		
LR, ABS, DNV, KR, BV, GL, RINA, NK		

Air circuit breakers

Metasol ACB Series



Type			
Ampere frame		(AF)	
Rated current(A)	(In max)	at 40℃	
Setting current (A) *	Control trip relay (... × In max)		
Rated current of neutral pole (A)			
Rated insulation voltage (V)	(Ui)		
Rated operating voltage (V)	(Ue)		
Rated impulse withstand voltage (kV)	(Uimp)		
Frequency (Hz)			
Number of poles (P)			
Rated breaking capacity (kA sym)		220V/230V/380V/415V	
IEC 60947-2	(Icu)	460V/480V/500V	
AC 50/60Hz		550V/600V/690V	
Rated service breaking capacity (kA)	(Ics)	... % × Icu	
Rated making capacity (kA peak)		220V/230V/380V/415V	
IEC 60947-2	(Icm)	460V/480V/500V	
AC 50/60Hz		550V/600V/690V	
Rated short-time		1 sec	
withstand current (kA)	(Icw)	2 sec	
		3 sec	
Operating time (ms)		Maximum total breaking time	
		Maximum closing time	
Life cycle (time)	Mechanical	Without maintenance	
		With maintenance	
	Electrical	Without maintenance	
		With maintenance	
Connections **	Draw-out / Fixed	Horizontal connection	
		Vertical connection	
		Front connection	
		Mixed connection	
Weight (kg) (3P/4P)	Draw-out type	Main body (With cradle)	Motor charging type
			Manual charging type
	Fixed type	Cradle only	
			Motor charging type
			Manual charging type
External dimensions (mm) (H×W×D)		Draw-out	3P
		type	4P
		Fixed type	3P
			4P
Trip relay			
Certificate & Approval			
Marine classification			

* Refer to trip relay specification. ** ●: Standard, ○: Option

Metasol					
AN-06D	AN-08D	AN-10D	AN-13D	AN-16D	AS-20D
630	800	1000	1250	1600	2000
200	400				
400	630	1000	1250	1600	2000
630	800				
(0.4 ~ 1.0) × In max					
400	400				
630	630	1000	1250	1600	2000
	800				
1000					
690					
12					
50/60					
3, 4					
65					70
65					70
50					65
100%					100%
143					154
143					154
105					143
50					65
42					55
36					50
40					
80					
20,000					
30,000					
5,000					
10,000					
●					-
○					●
○					-
○					-
63/74					70/85
61/72					68/83
29/32					33/40
34/44					38/47
32/42					36/45
430 × 334 × 375					
430 × 419 × 375					
300 × 300 × 295					
300 × 385 × 295					
N, A, P type					
KS / KEMA / KERI / GOST					
LR, ABS, DNV, KR, BV, GL, RINA, NK					



Metasol			
AS-20E	AS-25E	AS-32E	AS-40E
2000	2500	3200	4000
630, 800 1000, 1250 1600, 2000	2500	3200	4000
(0.4 ~ 1.0) × In max			
630, 800 1000, 1250 1600, 2000	2500	3200	4000
1,000			
690			
12			
50/60			
3, 4			
85			
85			
85			
100%			
187			
187			
187			
85			
75			
65			
40			
80			
15,000			
20,000			
5,000			
10,000			
●			○
○			●
○			-
○			-
87/103			104/147
85/101			102/145
44/50			58/70
44/55			63/100
42/53			61/98
430×412×375			
430×527×375			
300×378×295			
300×493×295			
N, A, P type			
KS / KEMA / KERI / GOST			
LR, ABS, DNV, KR, BV, GL, RINA, NK			

Metasol	
AS-50F	
4000	5000
4000	5000
(0.4 ~ 1.0) × In max	
4000	5000
1000	
690	
12	
50/60	
3, 4	
100	
100	
85	
100%	
220	
220	
187	
85	
75	
65	
40	
80	
10,000	
15,000	
2,000	
5,000	
○	●
-	-
-	-
145/173	143/171
78/90	76/94
74/92	
460 × 629 × 375	
460 × 799 × 375	
300 × 597 × 295	
300 × 767 × 295	
N, A, P type	
KS / KEMA / KERI / GOST	
LR, ABS, DNV, KR, BV, GL, RINA, NK	

Metasol		
AS-40G	AS-50G	AS-63G
4000	5000	6300
4000	5000	6300
(0.4 ~ 1.0) × In max		
4000	5000	6300
1,000		
690		
12		
50/60		
3, 4		
120		
120		
100		
100%		
264		
264		
220		
100		
90		
85		
40		
80		
10,000		
15,000		
2,000		
5,000		
○		
●		
-		
-		
181/223		186/230
179/221		184/228
97/117		102/124
98/123		103/130
96/121		101/128
460×785×375		
460×1015×375		
300×751×295		
300×981×295		
N, A, P type		
KS / KEMA / KERI / GOST		
LR, ABS, DNV, KR, BV, GL, RINA, NK		

Trip relay(OCR)

The trip relay of Susol ACB provides the additional protection functions for voltage, frequency, unbalance, and others in addition to main protection functions for over current, short-circuit, ground fault. It supports the advanced measurement functions for voltage, current, power, electric energy, harmonics, communication function, and others.

Analog trip function interlocked with mechanism enhanced a durability of devices as well as the breaking capacity of ACB.

Zone selective interlocking function makes the protective coordination more simple and thermal memory can be applied to various loads.



Trip relay types

Classification	N type	A type	P type	S type
Externals				
Current protection	• L / S / I / G / Thermal	• L / S / I / G / Thermal • ZSI(Protective coordination)	• L / S / I / G / Thermal(Continuous) • ZSI(Protective coordination)	• P type
Other protection	-	• Earth leakage (Option)	• Earth leakage(Option) • Over/Under current • Over/Under frequency • Unbalance(Voltage/Current) • Reverse power	• P type
Measurement function	-	• Current (R / S / T / N)	• 3 Phase Voltage/Current RMS/Vector • Power(P, Q, S), PF(3-Phase) • Energy(Positive/Negative) • Frequency, Demand	• 3 Phase Voltage/Current RMS/Vector • Power(P, Q, S), PF(3-Phase) • Energy(Positive/Negative) • Frequency, Demand • Voltage/Current harmonics (1st~63th) • 3 Phase Waveforms • THD, TDD, K-Factor
Fine adjustment	-	-	• Fine adjustment for long/short time delay/instantaneous/ ground	• P type
Pre Trip Alarm	-	-	• Overload protection relays : DO (Alarm) (Ground fault is not available when using Pre trip alarm)	• P type
Digital Output	-	• 3DO (Fixed) • L, S/I, G Alarm	• 3DO (Programmable) • Trip, Alarm, General	• P type
IDMTL setting	-	-	• Compliance with IEC60255-3 SIT, VIT, EIT, DT	• P type
Communication	-	• Modbus/RS-485 • Profibus-DP	• Modbus / RS-485 • Profibus-DP	• Modbus / RS-485 • Profibus-DP
Power supply	• Self Power -Power source works over 20% of load current.	• Self Power - Power source works over 20% of load current. - External power source are required for comm. • AC/DC 100~250V • DC 24~60V	• AC/DC 100~250V • DC 24~60V Basic protection function(L / S / I / G) is still under normal operation without control power.	• AC/DC 100~250V • DC 24~60V
RTC timer	• Available	• Available	• Available	• Available
LED for trip info.	• Long time delay • Short time delay/Instantaneous • Ground fault	• N type	• N type	• N type
Fault recording	-	• 10records (Fault/Current/Date and Time)	• 256records (Fault/Current/Date and Time)	• 256records • Last fault wave recording (3 Phase)
Event recording	-	-	• 256 records(Content, Status, Date)	• P type
Operating button	• Reset button	• Reset, Menu Up/Down, Left/Right, Enter	• A type	• A type

LS Final Distribution Boards

LS Final Distribution Boards is fully type-tested by ASTA and specially designed for residential and commercial area for the protection of people and equipment.



شركة أبوظبي للتوزيع
Abu Dhabi Distribution Co.

ASTA

CERTIFICATE OF TYPE TESTS

Laboratory Ref. No. 1048/2009

APPARATUS:

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

DESCRIPTION:

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

TESTED BY:

Power Testing & Test
Power Testing & Test
Power Testing & Test

DATE OF TEST:

14/10/2009 to 14/10/2009
The apparatus, constructed in accordance with the
certificate has been subjected to the tests

ASTA 1048/2009 - LS Final Distribution Board Assembly
Temperature: 25°C (77°F) (ASTA 1048/2009)

The results are in accordance with the
certificate and the tests performed in accordance
with the standard IEC 60439-3:2007

Percentage accepted by the manufacturer
The amount of material tested according to the
certificate has been subjected to the tests

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

LS Final Distribution Board Assembly
LS Final Distribution Board Assembly
LS Final Distribution Board Assembly

Full range of Residential & Commercial Distribution System



Features:


- Designed to provide higher level of safety for final distribution board
- Pan assembly type busbar systems to provide easier cabling
- Split neutral bars provide easy connection and maximum cable space
- Easy and safe mounting of LS Miniature Circuit Breaker
- Flush and surface mounted
- Tin plate and cooper busbar
- Galvanized 1.2mm steel sheet

Technical Description

- In compliance with standards : IEC 60439-3
- Short-circuit withstand: 17kA/0.2s
- Peak short time withstand: 35kA
- Index of degree: IP 4X
- Rated operational Voltage(Ue): 415V
- Rated insulation Voltage(Ui): 460V
- Rated Frequency: 50/60Hz
- Rated impuls withstand Voltage(Uimp): 4kV
- Rated Current (In): Upto 125A



Internal view

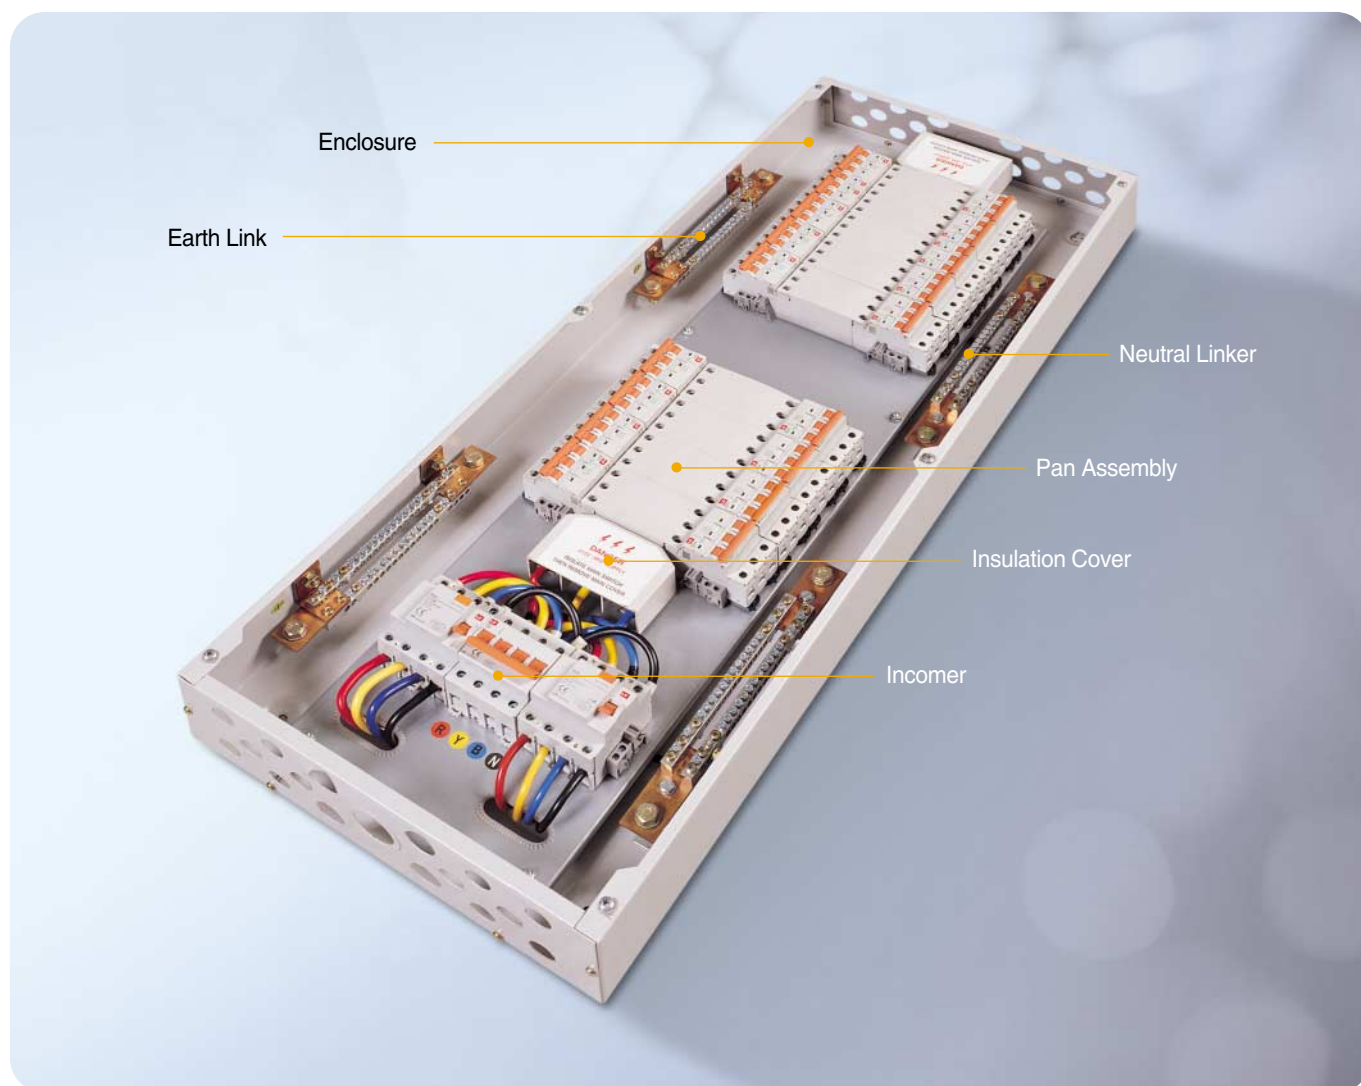

Pan Assembly System




- Rigid and removable pan assembly to provide easier cabling
- Modular panel system
- Flexible connect with CB, RCCB and Disconnect switch

LS Final Distribution Boards

Specific of FDB Split busbar type

with incoming Isolator feeding two ELCBs

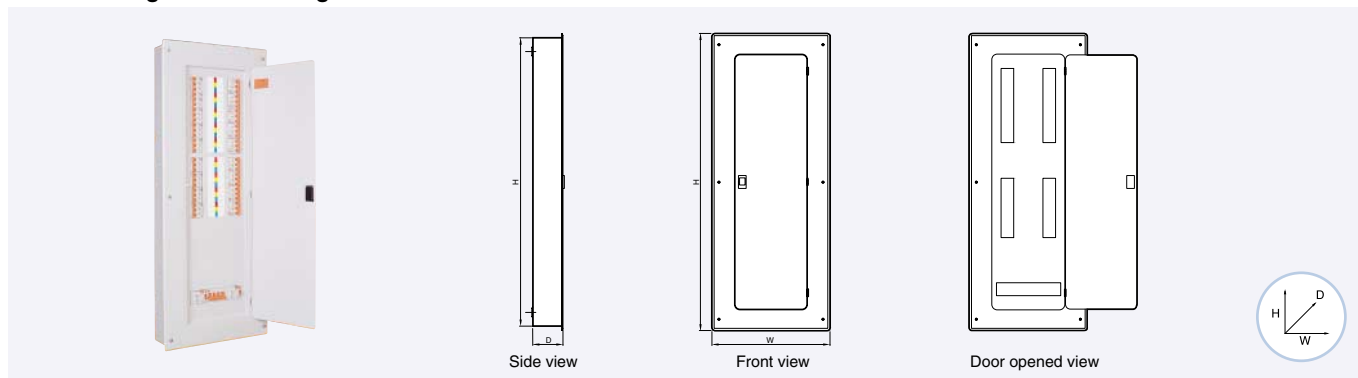


Selection of Enclosure

Code Description	Type	Dimension
02+02 Way Split DB	Flush	530H×430W×110D mm
04+02 Way Split DB		580H×430W×110D mm
04+04 Way Split DB		680H×430W×110D mm
06+04 Way Split DB		780H×430W×110D mm
06+06 Way Split DB		780H×430W×110D mm
08+06 Way Split DB		830H×430W×110D mm
08+08 Way Split DB		980H×430W×110D mm
10+08 Way Split DB		980H×430W×110D mm
12+06 Way Split DB		980H×430W×110D mm
02+02 Way Split DB	Surface	510H×410W×110D mm
04+02 Way Split DB		560H×410W×110D mm
04+04 Way Split DB		660H×410W×110D mm
06+04 Way Split DB		760H×410W×110D mm
06+06 Way Split DB		760H×410W×110D mm
08+06 Way Split DB		810H×410W×110D mm
08+08 Way Split DB		960H×410W×110D mm
10+08 Way Split DB		960H×410W×110D mm
12+06 Way Split DB		960H×410W×110D mm

Single busbar & Single Incomer type

With Incoming 4P ELCB/MCB/Isolator

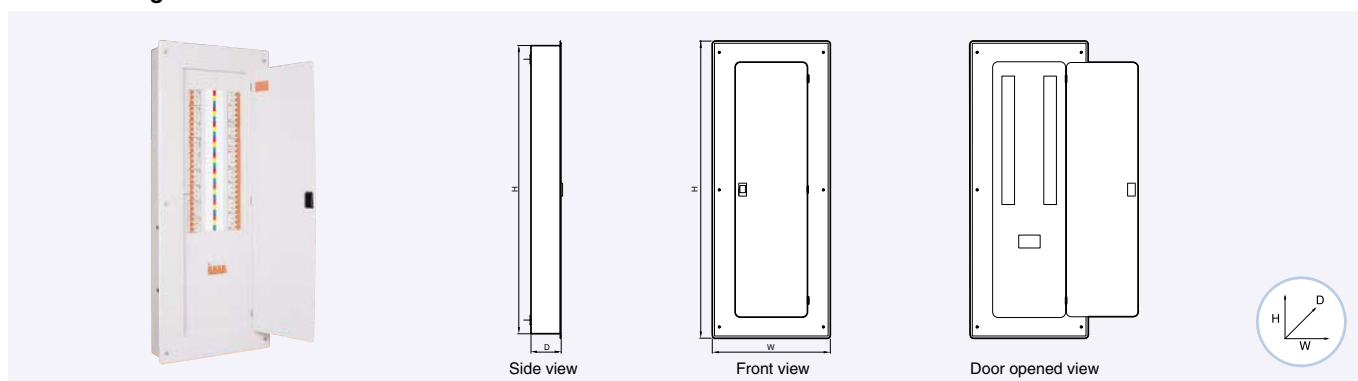


Selection of Enclosure

Code Description	Type	Dimension
4 Way DB 1 INC	Flush	530H×430W×110D mm
6 Way DB 1 INC		580H×430W×110D mm
8 Way DB 1 INC		680H×430W×110D mm
12 Way DB 1 INC		780H×430W×110D mm
14 Way DB 1 INC		830H×430W×110D mm
18 Way DB 1 INC		980H×430W×110D mm
20 Way DB 1 INC		Not Common
24 Way DB 1 INC		Not Common
4 Way DB 1 INC	Surface	510H×410W×110 D mm
6 Way DB 1 INC		560H×410W×110 D mm
8 Way DB 1 INC		660H×410W×110 D mm
12 Way DB 1 INC		760H×410W×110 D mm
14 Way DB 1 INC		810H×410W×110 D mm
18 Way DB 1 INC		960H×410W×110 D mm
20 Way DB 1 INC		Not Common
24 Way DB 1 INC		Not Common

Specific of FDB

Single busbar & Dual Incomer type

With Incoming Isolator & ELCB

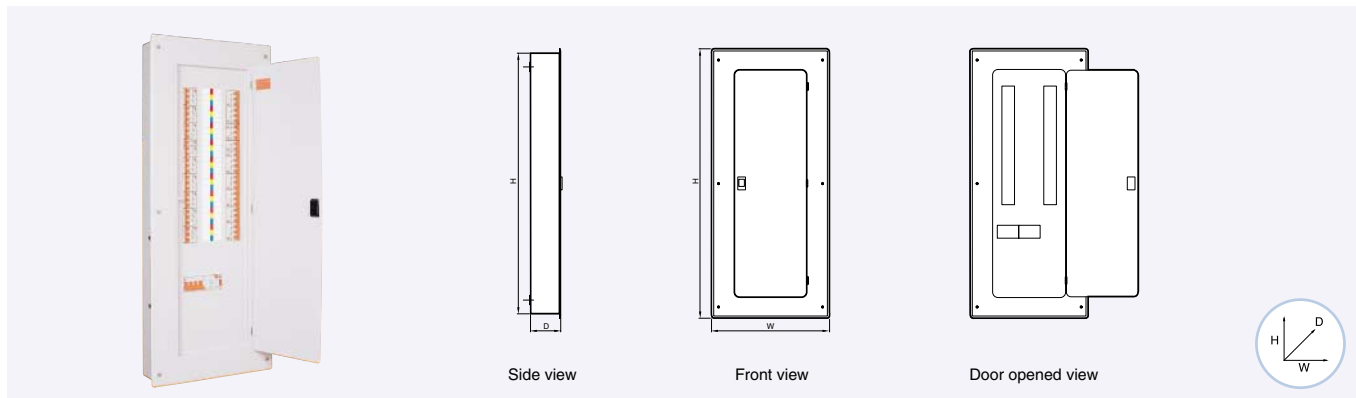


Selection of Enclosure

Code Description	Type	Dimension
4 Way DB 2 INC	Flush	530H×430W×110D mm
6 Way DB 2 INC		580H×430W×110D mm
8 Way DB 2 INC		680H×430W×110D mm
12 Way DB 2 INC		780H×430W×110D mm
14 Way DB 2 INC		830H×430W×110D mm
18 Way DB 2 INC		980H×430W×110D mm
20 Way DB 2 INC		Not Common
24 Way DB 2 INC		Not Common
4 Way DB 2 INC	Surface	510H×410W×110D mm
6 Way DB 2 INC		560H×410W×110D mm
8 Way DB 2 INC		660H×410W×110D mm
12 Way DB 2 INC		760H×410W×110D mm
14 Way DB 2 INC		810H×410W×110D mm
18 Way DB 2 INC		960H×410W×110D mm
20 Way DB 2 INC		Not Common
24 Way DB 2 INC		Not Common

SP&N Consumer Unit

Incoming 2P ELCB / MCB / Isolator

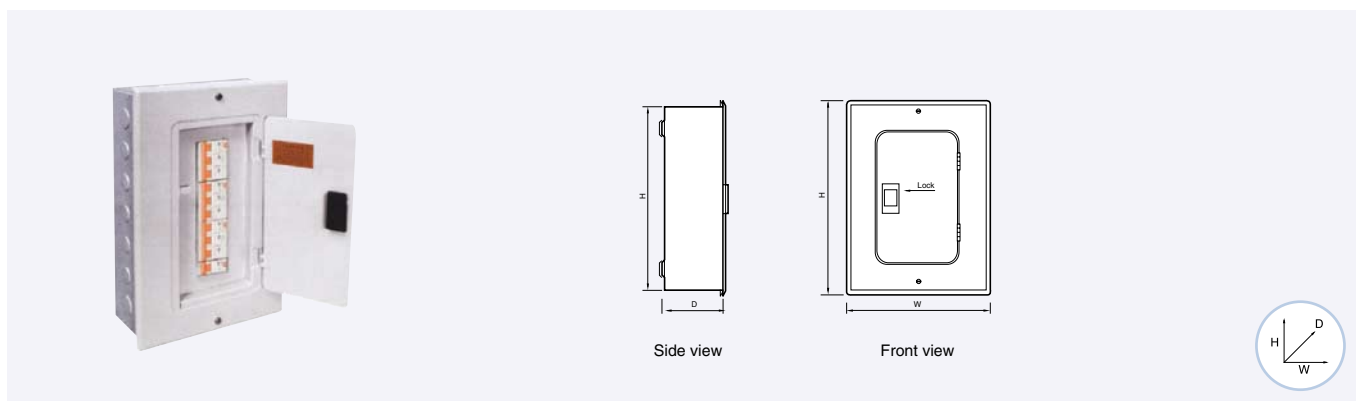

Selection of Enclosure

Code Description	Type	Dimension
6 Way 1P C.Unit		320H×240W×100D mm
9 Way 1P C.Unit		370H×240W×100D mm
12 Way 1P C.Unit		420H×250W×100D mm
15 Way 1P C.Unit		490H×250W×100D mm
18 Way 1P C.Unit		550H×250W×100D mm
22 Way 1P C.Unit		Not Common

- LS SMDB Solutions are arranged for 3 Phase and neutral incoming supply and specially designed easy to install MCCBs.
- These are fitted with Form 3b and 2 busbar assemblies, tested and ASTA Certified.



Rating

- A wide choice of incoming MCCBs make LS SMDB panels flexible to suit most of the requirements and represent excellent value and will appeal to consultants, contractors, end users and OEMs. These are offered in ratings of 125A, 250A, 400A, 630A.
- All incoming and outgoing MCCBs have Thermal/Magnetic fixed and adjustable tripping mechanisms incorporated with a trip-to-test button. These are available in ratings as follows : 16, 20, 25, 32, 40, 50, 63, 80, 100, 125, 160, 250, 400, 630A.

Technical Specifications

Constructional Characteristics


- Complied with IEC 60947-1
- Fully Type Tested, ASTA Certified
- Degree of protection : IP41 as per IEC 60529
- Form of separation: Form 3b
- Enclosure constructed from rigid folded zinc phosphate and protected both internally and externally with polyester powder coating

Electrical Characteristics

- Rated Operational Voltage U_e : upto 690V
- Rated Insulation voltage U_i : upto 750V
- Rated Frequency: 50/60Hz
- Rated Impulse withstand voltage U_{imp} : 8kV
- Rated Short time I_{cw} & peak withstand I_{pk} Current: 36kA/1S

Incoming Devices

MCCB Panelboards

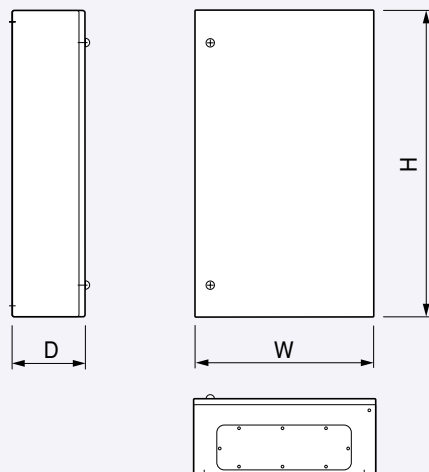

Metasol Series

Incoming Breaker 250 Amps Outgoing Breaker 100 Amps				Incoming Breaker 400 Amps Outgoing Breaker 100 Amps				Incoming Breaker 630 Amps Outgoing Breaker 100 Amps			
No of Ways	Width	Height	Depth	No of Ways	Width	Height	Depth	No of Ways	Width	Height	Depth
2	700	800	180	4	700	1000	250				
4	700	800	180	6	700	1000	250	6	800	1000	250
6	700	800	180	8	700	1200	250	8	800	1200	250
8	700	1000	180	10	700	1400	250	10	800	1400	250
10	700	1200	180	12	700	1400	250	12	800	1400	250
12	700	1200	180	14	700	1600	250	14	800	1600	250

Susol TD/TS Series

Incoming Breaker 250 Amps Outgoing Breaker 100 Amps				Incoming Breaker 400 Amps Outgoing Breaker 100 Amps				Incoming Breaker 630 Amps Outgoing Breaker 100 Amps			
No of Ways	Width	Height	Depth	No of Ways	Width	Height	Depth	No of Ways	Width	Height	Depth
2	700	800	180	4	700	1000	250				
4	700	800	180	6	700	1000	250	6	800	1000	250
6	700	800	180	8	700	1200	250	8	800	1200	250
8	700	1000	180	10	700	1400	250	10	800	1400	250
10	700	1200	180	12	700	1400	250	12	800	1400	250
12	700	1200	180	14	700	1600	250	14	800	1600	250


LS SMDB Solution

Incoming Devices

LSIS “Susol series” range of MCCBs

Rated current, In	250A 630A								
Rated operational voltage, Ue	750V								
MCCB breaker type	TS250			TS400			TS630		
Ultimate breaking capacity, Icu (kA rms) at 415V	N	H	L	N	H	L	N	H	L
	50	85	150	50	85	150	50	85	150
Service breaking capacity, Ics.....%Icu	100% Icu			100% Icu			100% Icu		
Protection trip unit	Thermal magnetic / Electronic								
Switch disconnector type TS	TS250NA			TS400NA			TS630NA		
Short-circuit making capacity Icm (kApeak) (with upstream circuit breaker)	4.9			7.1			8.5		


Incoming application

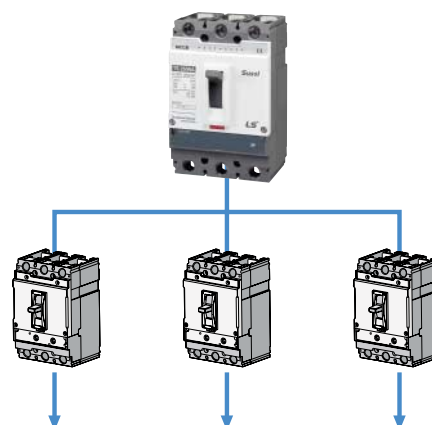

LSIS “Metasol series” range of MCCBs

Rated current, In	250A 630A		
Rated operational voltage, Ue	690V		
Breaker type	ABS203c	ABS403c	ABS803c
Ultimate breaking capacity, Icu (kA rms) at 415V	37	50	65
Service breaking capacity, Ics.....%Icu	100% Icu	100% Icu	100% Icu
Protection trip unit	Thermal magnetic		

Incoming application

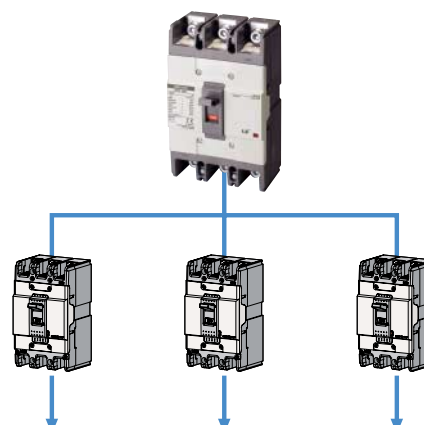


Outgoing devices

LSIS “Susol series” range of MCCBs

Rated current, In	16A 250A					
Rated operational voltage, Ue	upto 750V					
Breaker type	TD100, TD160, TS100, TS160, TS250					
	N		H		L	
No. of poles	1P	3P	1P	3P	1P	3P
Ultimate breaking capacity, Icu (kA rms) at 240V	30	100	50	120	-	200
Service breaking capacity, Ics.....%Icu	100% Icu					
Protection trip unit	Thermal magnetic / Electronic					


Incoming application

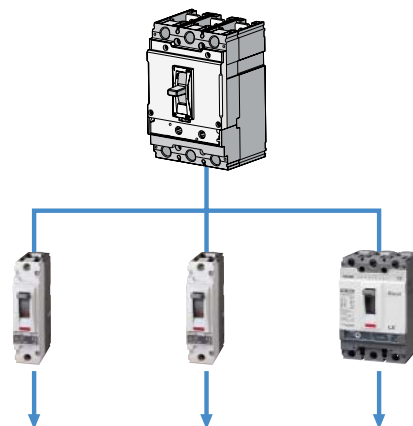

LSIS “Metasol series” range of MCCBs

Rated current, In	15A 100A					
Rated operational voltage, Ue	upto 415V - Single pole upto 690V - Three pole					
Breaker type	ABS103c					
	N		H		L	
No. of poles	2P	3P	2P	3P	2P	3P
Ultimate breaking capacity, Icu (kA rms) at 240V	35		85		100	
Ultimate breaking capacity, Icu (kA rms) at 415V	18		37		50	
Service breaking capacity, Ics.....%Icu	100% Icu					
Protection trip unit	Thermal magnetic					

Incoming application

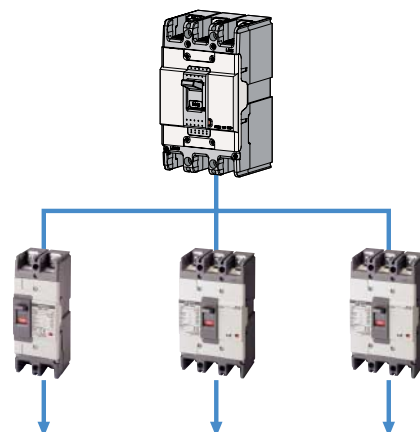

Vacuum Circuit Breakers

Susol VCB Series

VL 06

Type			VL-06□ 08□ 04		VL-06□ 13□ 06	
Rated voltage		Ur (kV)	7.2			
Rated normal current		Ir (A)	400		630	
Rated frequency		fr (Hz)	50/60			
Rated short-circuit current		Isc (kA)	8		12.5	
Rated short-time withstand current (3 sec)		Ik (kA)	8		12.5	
Rated short-circuit breaking capacity		(MVA)	100		160	
Rated short-circuit making current		Ip (kA)	20.8		32.5	
Rated breaking time		(cycle)	3			
Rated withstand voltage	Power frequency (1 min)	Ud (kV)	20			
	Impulse (1.2 × 50μs)	Up (kV)	60			
Rated operating sequence			O-0.3s-CO-15s-CO			
Control voltage	Closing coil	(V)	AC/DC 100~130V, AC/DC 200~250V, DC 125V, DC 24~30V, DC 48~60V, AC 48V			
	Trip coil	(V)	AC/DC 100~130V, AC/DC 200~250V, DC 125V, DC 24~30V, DC 48~60V, AC 48V			
Auxiliary contact			2a2b, 4a4b, 6a6b			
Rated opening time		(sec)	≤ 0.04			
No-load closing time		(sec)	≤ 0.06			
Type test	Mechanical		M2			
	Electrical		E2 (List1)			
	Capacitive current switching		C2			
Lifetime *	Mechanical	(time)	30000			
	Electrical	(time)	30000			
Installation	Fixed		P type			
	Draw-out		E, F, G type (for MESG)			
Pole centre distance		(mm)	130			
Weight	CB (E, F, G type)	(kg)	37		37	
	Cradle (E, F, G type)	(kg)	18, 25, 32		19, 26, 33	
Applied standards			IEC 62271-100, KS C 4611, JEC 2300/JIS C 4603			

* With maintenance

VL 06...17

Type			VL-06□20/25□06/13/20			VL-12□20/25□06/13/20			VL-17□20/25□06/13/20		
Rated voltage		Ur (kV)	7.2			12			17.5		
Rated normal current		Ir (A)	630	1250	2000	630	1250	2000	630	1250	2000
Rated frequency		fr (Hz)	50/60								
Rated short-circuit current		Isc (kA)	20/25								
Rated short-time withstand current (4 sec)		Ik (kA)	20/25								
Rated short-circuit breaking capacity		(MVA)	250/310			410/520			600/750		
Rated short-circuit making current		Ip (kA)	62.5/65								
Rated breaking time		(cycle)	3								
Rated withstand voltage	Power frequency (1 min)	Ud (kV)	20			28 (42)			38		
	Impulse (1.2×50μs)	Up (kV)	60			75			95		
Rated operating sequence			O-0.3s-CO-15s-CO								
Control voltage	Closing coil	(V)	DC 24~30V, DC 48~60V, DC 110V, DC 125V, DC 220V, AC 48V, AC 100~130V, AC 220~250V								
Trip coil	(V)		DC 24~30V, DC 48~60V, DC 110V, DC 125V, DC 220V, AC 48V, AC 100~130V, AC 220~250V								
Auxiliary contact			4a4b, 10a10b								
Rated opening time		(sec)	≤ 0.04								
No-load closing time		(sec)	≤ 0.06								
Type test	Mechanical		M2								
	Electrical		E2 (List3)								
	Capacitive current switching		C2								
Lifetime *	Mechanical	(time)	30000								
	Electrical	(time)	30000								
Installation	Fixed		P type			P type					
	Draw-out		E, F, G type (for MESG), H type (for MCSG)			E, F type (for MESG), H type (for MCSG)					
Pole centre distance		(mm)	150			150 (210)			150 (210)		
Weight	CB (H type)	(kg)	100	100	130	115 (120)	115 (120)	130 (140)	115 (120)	115 (120)	130 (140)
	Cradle (H type)	(kg)	170	170	180	170 (200)	170 (200)	180 (200)	170 (200)	170 (200)	180 (200)
Applied standards			IEC 62271-100								

* With maintenance

VH 06...36

Type			VH-06□50□12/20/25/32/40					VH-12□50□12/20/25/32/40					VH-17□50□12/20/25/32			
Rated voltage		Ur (kV)	7.2					12					17.5			
Rated normal current		Ir (A)	1250	2000	2500	3150	4000	1250	2000	2500	3150	4000	1250	2000	2500	3150
Rated frequency		fr (Hz)	50/60													
Rated short-circuit current		Isc (kA)	50													
Rated short-time withstand current (3 sec)		Ik (kA)	50													
Rated short-circuit breaking capacity		(MVA)	623					1039					1515			
Rated short-circuit making current		Ip (kA)	130													
Rated breaking time		(cycle)	3													
Rated withstand voltage	Power frequency (1 min)	Ud (kV)	20					28					38			
	Impulse (1.2×50μs)	Up (kV)	60					75					95			
Rated operating sequence			O-0.3s-CO-3min-CO													
Control voltage	Closing coil	(V)	DC 48V, DC 110V, DC 125V, DC 220V, AC 48V, AC 110V, AC 220V													
	Trip coil	(V)	DC 48V, DC 110V, DC 125V, DC 220V, AC 48V, AC 110V, AC 220V													
Auxiliary contact			4a4b, 10a10b													
Rated opening time		(sec)	≤ 0.04													
No-load closing time		(sec)	≤ 0.06													
Type test	Mechanical		M2													
	Electrical		E2 (List3)													
	Capacitive current switching		C2													
Lifetime *	Mechanical	(time)	20000													
	Electrical	(time)	20000													
Installation	Fixed		P type				-	P type				-	P type			
	Draw-out		H type (for MCSG)				G type**	H type (for MCSG)				G type**	H type (for MCSG)			
Pole centre distance		(mm)	210		275		275	210		275		275	210		275	
Weight	CB (H type)	(kg)	230	287	290	385	230	287	290	385	230	287	290			
	Cradle (H type)	(kg)	175	320	320	315	175	320	320	315	175	320	320			
Applied standards			IEC 62271-100													

* With maintenance

** G type (for MCSG)

Type			VH-20□25□25		VH-20□32□12/20/32			VH-20□40□12/20/32		
Rated voltage		Ur (kV)			24/25.8					
Rated normal current		Ir (A)	2500		1250	2000	3150	1250	2000	3150
Rated frequency		fr (Hz)	60							
Rated short-circuit current		Isc (kA)	25		31.5			40		
Rated short-time withstand current (3 sec)		Ik (kA)	25		31.5			40		
Rated short-circuit breaking capacity		(MVA)	1039/1117		1309/1407			1662/1787		
Rated short-circuit making current		Ip (kA)	65		82			104		
Rated breaking time		(cycle)	3							
Rated withstand voltage	Power frequency (1 min)	Ud (kV)	60 (65)							
	Impulse (1.2×50μs)	Up (kV)	125							
Rated operating sequence			O-0.3s-CO-3min-CO							
Control voltage	Closing coil	(V)	DC 48V, DC 110V, DC 125V, DC 220V, AC 48V, AC 110V, AC 220V							
	Trip coil	(V)	DC 48V, DC 110V, DC 125V, DC 220V, AC 48V, AC 110V, AC 220V							
Auxiliary contact			4a4b, 10a10b							
Rated opening time		(sec)	≤ 0.04							
No-load closing time		(sec)	≤ 0.06							
Type test	Mechanical		M2							
	Electrical		E2 (List3)							
	Capacitive current switching		C2							
Lifetime *	Mechanical	(time)	20000							
	Electrical	(time)	20000							
Installation	Fixed		P type							
	Draw-out		H type (for MCSG)							
Pole centre distance		(mm)	275		210	210 (275)	275	210	210 (275)	275
Weight	CB (H type)	(kg)	295		256	256 (273)	318	256	256 (273)	318
	Cradle (H type)	(kg)	316		257	257 (284)	316	257	257 (284)	316
Applied standards			IEC 62271-100							

* With maintenance

Vacuum Circuit Breakers

Susol VCB Series

VH 06...36

Type			VH-36□25□12/20/32			VH-36□32□12/20/32			VH-36□40□12/20/32		
Rated voltage		Ur (kV)	36								
Rated normal current		Ir (A)	1250	2000	3150	1250	2000	3150	1250	2000	3150
Rated frequency		fr (Hz)	50/60								
Rated short-circuit current		Isc (kA)	25			31.5			40		
Rated short-time withstand current (3 sec)		Ik (kA)	25			31.5			40		
Rated short-circuit breaking capacity		(MVA)	1559			1964			2494		
Rated short-circuit making current		Ip (kA)	65			81.9			104		
Rated breaking time		(cycle)	3								
Rated withstand voltage	Power frequency (1 min)	Ud (kV)	70 (95)								
	Impulse (1.2 × 50/μs)	Up (kV)	170								
Rated operating sequence			O-0.3s-CO-3min-CO								
Control voltage	Closing coil	(V)	DC 48V, DC 110V, DC 125V, DC 220V, AC 48V, AC 110V, AC 220V								
	Trip coil	(V)	DC 48V, DC 110V, DC 125V, DC 220V, AC 48V, AC 110V, AC 220V								
Auxiliary contact			4a4b, 10a10b								
Rated opening time		(sec)	≤ 0.04								
No-load closing time		(sec)	≤ 0.06								
Type test	Mechanical		M2								
	Electrical		E2 (List3)								
	Capacitive current switching		C2								
Lifetime *	Mechanical	(time)	20000								
	Electrical	(time)	20000								
Installation	Fixed		P type								
	Draw-out		H type (for MCSG)								
Pole centre distance		(mm)	300								
Weight	CB (H type)	(kg)	400		490	400		490	400		490
	Cradle (H type)	(kg)	700		750	700		750	700		750
Applied standards			IEC 62271-100								


* With maintenance



Accessories


Dimensions	Main	Cradle
	• Secondary trip coil • Under voltage trip release • Current trip coil • Position S/W • Keylock • Button padlock • Button cover • Mechanical position indicator	• Mechanical position indicator
	• Secondary trip coil • Under voltage trip release • Current trip coil • Position S/W • Keylock • Button padlock • Button cover • Plug interlock • Mechanical position indicator	• Earthing S/W • Earthing S/W with position S/W • Earthing S/W with keylock • Door interlock • MOC • TOC • Shutter padlock • Emergency mechanical trip device
	• Secondary trip coil • Under voltage trip release • Current trip coil • Position S/W • Keylock • Button padlock • Button cover • Plug interlock • Mechanical position indicator	• Earthing S/W • Earthing S/W with position S/W • Earthing S/W with keylock • Door interlock • MOC • TOC • Shutter padlock • Emergency mechanical trip device

Various type of Cradle




E type

- No Shutter
- For MESG



F type

- Insulation Shutter
- For MESG



G type

- Bushing
- Insulation Shutter
- For MESG



H type

- Bushing
- Metal Insulation Shutter
- Closed Compartment structure
- Earthing Switch & Interlock
- For MCSG
- Door Interlock

Leading Innovation, Creating Tomorrow 



Safety Instructions

- For your safety, please read user's manual thoroughly before operating.
- Contact the nearest authorized service facility for examination, repair, or adjustment.
- Please contact qualified service technician when you need maintenance.
Do not disassemble or repair by yourself!
- Any maintenance and inspection shall be performed by the personnel having expertise concerned.

© 2004.2 LS Industrial Systems Co.,Ltd. All rights reserved.

LS Industrial Systems Co., Ltd.

www.lsis.biz

■ **HEAD OFFICE**

LS Tower 1026-6, Hogue-dong, Dongan-gu,
Anyang-si, Gyeonggi-do 431-848, Korea
Tel. (82-2)2034-4887, 4873, 4918, 4148
Fax. (82-2)2034-4648

■ **CHEONG-JU PLANT**

Cheong-Ju Plant #1, Song Jung Dong, Hung Duk Ku,
Cheong Ju, 361-720, Korea

■ **Global Network**

- **LS Industrial Systems (Middle East) FZE >> Dubai, U.A.E.**
Address: LOB 19 JAFZA VIEW TOWER Room 205, Jebel Ali Freezone P.O. Box 114216, Dubai, United Arab Emirates
Tel: 971-4-886 5360 Fax: 971-4-886-5361 e-mail: jungyongl@lsis.biz
- **Dalian LS Industrial Systems Co., Ltd. >> Dalian, China**
Address: No.15, Liaohexi 3-Road, Economic and Technical Development zone, Dalian 116600, China
Tel: 86-411-8273-7777 Fax: 86-411-8730-7560 e-mail: lixx@lsis.com.cn
- **LS Industrial Systems (Wuxi) Co., Ltd. >> Wuxi, China**
Address: 102-A, National High & New Tech Industrial Development Area, Wuxi, Jiangsu, 214028, P.R.China
Tel: 86-510-8534-6666 Fax: 86-510-522-4078 e-mail: xuhg@lsis.com.cn
- **LS-VINA Industrial Systems Co., Ltd. >> Hanoi, Vietnam**
Address: Nguyen Khe - Dong Anh - Ha Noi - Viet Nam
Tel: 84-4-882-0222 Fax: 84-4-882-0220 e-mail: srjo@lsisvina.com
- **LS-VINA Industrial Systems Co., Ltd. >> Hochiminh, Vietnam**
Address: 41 Nguyen Thi Minh Khai Str. Yoco Bldg 4th Floor, Hochiminh City, Vietnam
Tel: 84-8-3822-7941 Fax: 84-8-3822-7942 e-mail: sbpark@lsisvina.com
- **LS Industrial Systems Tokyo Office >> Tokyo, Japan**
Address: 16FL, Higashi-Kan, Akasaka Twin Tower 17-22, 2-chome, Akasaka, Minato-ku Tokyo 107-8470, Japan
Tel: 81-3-3582-9128 Fax: 81-3-3582-2667 e-mail: jschuna@lsis.biz
- **LS Industrial Systems Shanghai Office >> Shanghai, China**
Address: Room E-G, 12th Floor Huamin Empire Plaza, No.726, West Yan'an Road Shanghai 200050, P.R. China
Tel: 86-21-5237-9977 (609) Fax: 89-21-5237-7191 e-mail: jinhk@lsis.com.cn
- **LS Industrial Systems Beijing Office >> Beijing, China**
Address: B-Tower 17FL Beijing Global Trade Center B/D. No.36, BeiSanHuanDong-Lu, DongCheng-District, Beijing 100013, P.R. China
Tel: 86-10-5825-6025,7 Fax: 86-10-5825-6026 e-mail: cuixiaorong@lsis.com.cn
- **LS Industrial Systems Guangzhou Office >> Guangzhou, China**
Address: Room 1403,14F, New Poly Tower, 2 Zhongshan Liu Road, Guangzhou, P.R. China
Tel: 86-20-8326-6764 Fax: 86-20-8326-6287 e-mail: linsz@lsis.biz
- **LS Industrial Systems Chengdu Office >> Chengdu, China**
Address: Room 1701 17Floor, huanminhanjun international Building, No1 Fuxing Road Chengdu, 610041, P.R. China
Tel: 86-28-8670-3101 Fax: 86-28-8670-3203 e-mail: yangcf@lsis.com.cn
- **LS Industrial Systems Qingdao Office >> Qingdao, China**
Address: 7B40, Haixin Guangchang Shenyue Building B, No.9, Shandong Road Qingdao 26600, P.R. China
Tel: 86-532-8501-6568 Fax: 86-532-583-3793 e-mail: lij@lsis.com.cn

Specifications in this catalog are subject to change without notice due to continuous product development and improvement.